





LEGEND
ARMSTRONG CEILING

BAJAJ

BCLA 01 236 CFL / BCLA 01 236 CFL LHD

Recess mounting, indirect lighting, CFL decorative luminaire with P5 louver

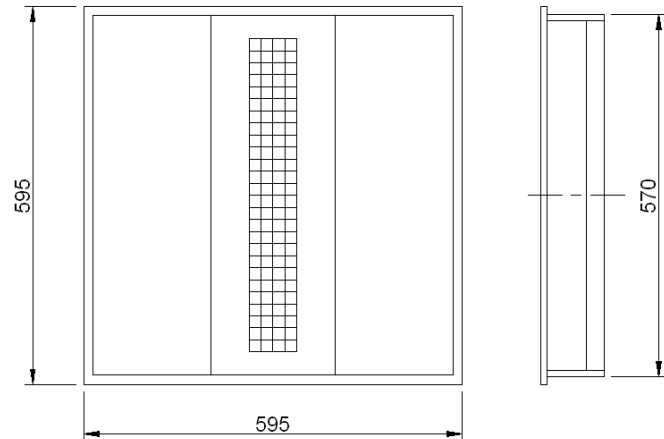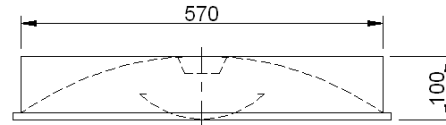

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

- Entrance lobbies
- Banks and offices
- Conference halls and control rooms
- Departmental stores and showrooms
- Hospitals and laboratories
- Computer centres, etc.

Specification

- Epoxy broken white powder coated CRCA sheet steel housing.
- Detachable CRCA concave shaped diffuser with P5 louver.
- Accessories for 2 x CFL 36W prewired upto terminal block.
- Wired with Open construction ballast / Leader (<10% THD) electronic ballast.
- Also available with 40W/55W CFL-4P Lamp.

Electrical Data

Product Code	Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. at 240 V	Capacitor Mfd.	Power Factor
162288	BCLA 01 236 CFL	2 x CFL 'L' 36/4P	240	0.42	8	≥ 0.90
530897	BCLA 01 236 CFL LHD	2 x CFL 'L' 36/4P	240	0.299	--	≥ 0.98

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRE Making the difference</p>	DRAWN	VDS	16-10-2007	FOR – STD.
	CHECKED	DVRS		REV - 1 DATE-24-01-2008
	APPROVED	CRR		DRG.No
	DATA SHEET RELEASED ON DT- Oct.-07			BCLA 01 236 CFL - 001