



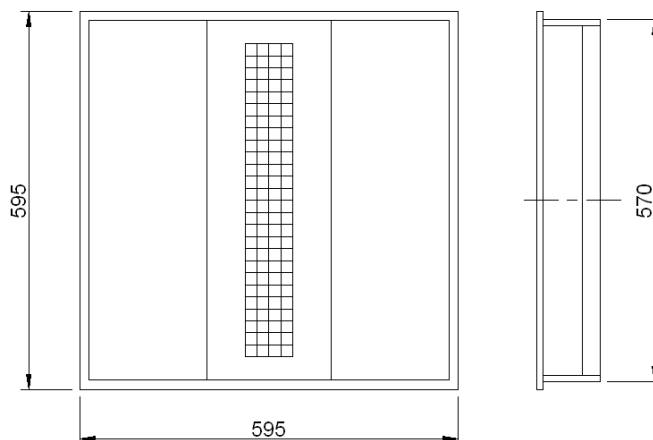

**LEGEND**  
**ARMSTRONG CEILING**

BCLA 01 236 CFL / BCLA 01 236 CFL WEB2

Recess mounting, indirect lighting, CFL decorative luminaire with P5 louver

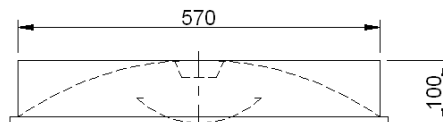

NOMINAL DIMENSIONS IN mm Tolerance +/-5

**Application**

- Entrance lobbies
- Banks and offices
- Conference halls and control rooms
- Departmental stores and showrooms
- Hospitals and laboratories
- Computer centres, etc.

**Specification**

- Epoxy broken white powder coated CRCA sheet steel housing.
- Detachable CRCA concave shaped diffuser with P5 louver.
- Accessories for 2 x CFL 36W prewired upto terminal block.
- Wired with Open construction ballast / < 30% HF electronic ballast.
- Also available with 40W/55W CFL-4P Lamp.

**Electrical Data**

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. at 240 V	Capacitor Mfd.	Power Factor
BCLA 01 236 CFL	2 x CFL 'L' 36/4P	240	0.42	8	≥ 0.90
BCLA 01 236 CFL WEB2	2 x CFL 'L' 36/4P	240	0.311	--	≥ 0.95

Data subject to variation due to change/improvement in the design, materials and processes.

<p><b>BAJAJ LUMINAIRES</b> Making the difference</p>	DRAWN	VDS	16-10-2007	FOR – STD.
	CHECKED	DVRS		REV - 1 DATE-24-01-2008
	APPROVED	CRR		DRG.No
	DATA SHEET RELEASED ON DT- Oct.-07			BCLA 01 236 CFL - 001