




**LEGEND**  
**ARMSTRONG CEILING**

BCLA 240 CFL DSP LHD / BCLA 414/424 DSP

Recess mounting, indirect lighting, CFL/T5 decorative luminaire with perforated concave louver

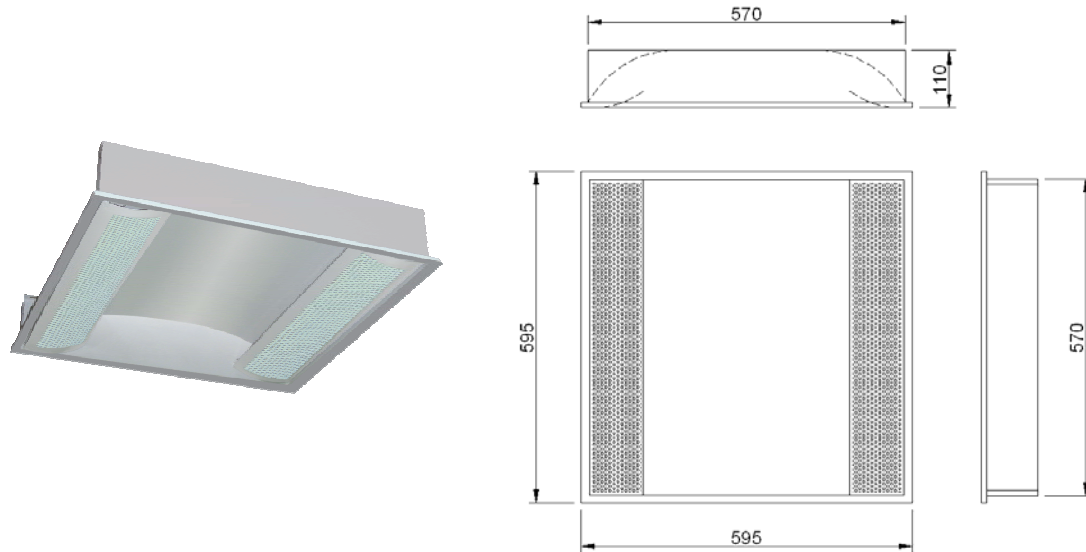

NOMINAL DIMENSIONS IN mm Tolerance +/-5

**Application**

- Commercial complexes,
- Showrooms,
- Airport lounges,
- Computer centers,
- Banks and hospitals,
- Design offices,
- Control rooms and laboratories, etc.

**Specification**

- Epoxy broken White powder coated CRCA sheet steel housing.
- Specially designed concave shaped CRCA perforated diffuser on both sides over individual lamp.
- Accessories for 2 x 40W CFL / 4 x 14/24W T5 lamp prewired upto terminal block.
- Wired with <10% THD HF electronic ballast for 2 x 40W CFL lamps.
- Wired with electronic ballast for 4 x T5 14/24W lamps.

**Electrical Data**

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. at 240 V	Power Factor
BCLA 240 CFL DSP LHD	2 x CFL 40	240	0.299	≥ 0.99
BCLA 414 DSP	4 x T5 14	240	0.28	≥ 0.90
BCLA 424 DSP	4 x T5 24	240	0.448	≥ 0.90

Data subject to variation due to change/improvement in the design, materials and processes.

<p><b>BAJAJ LUMINAIRE</b> Making the difference</p>	DRAWN	KPM	10-11-2008	FOR –
	CHECKED	DVRS		REV - 0 DATE-10-11-2008
	APPROVED	CRR		DRG.No
	DATA SHEET RELEASED ON DT-			BCLA 240 CFL DSP LHD - 001
<b>BAJAJ ELECTRICALS LIMITED</b> 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : <a href="mailto:luminaires@bajajelectricals.com">luminaires@bajajelectricals.com</a>