




LEGEND

BCNPA 236 CFL P5
BCNPA 236 CFL P5 WEB2

Recess mounted 2 x CFL 36W direct / indirect lighting luminaire

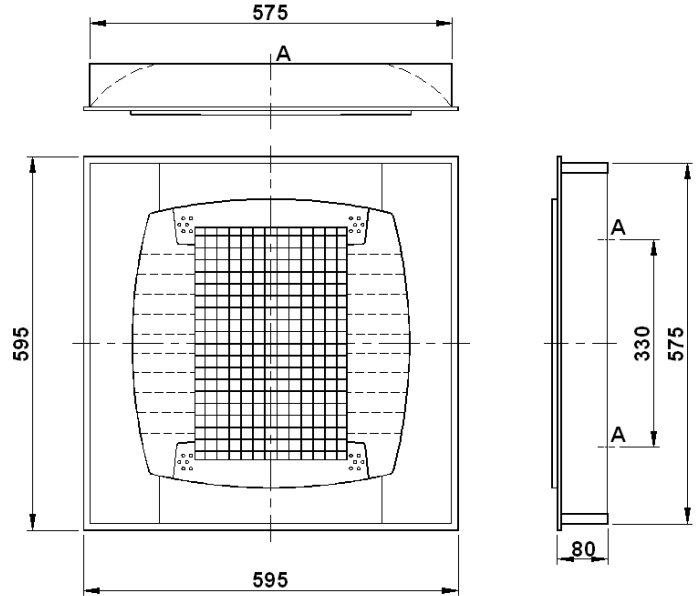

A = 20 DIA KNOCKOUT - 2 Nos.

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

- Commercial Complexes, Showrooms,
- Airport Lounges, Computer Centers,
- Banks, Hospitals, Conference Halls,
- Design Offices, Control Rooms, Laboratories, etc.

Specification

- The Recess mounted luminaire comprises of CRCA sheet steel housing, complete with control gear, wired with new generation accessories up to terminal block.
- The luminaire provides anti glare indirect light, with P5 Louver assembly in the center.
- P5 louver block is held in frame with push fit mechanism.
- Two coloured Engg. Plastic decorative side plates (Options of clear green, blue & orange), on each side, enhancing the aesthetics of luminaire.
- Wired with open construction ballast / HF electronic ballast.
- Finish: Housing - Epoxy white powder coated.

Electrical Data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. at 240 V	Capacitor Mfd.	Power Factor
BCNPA 236 CFL P5	2xCFL 'L' 36/4P	240	0.42	8	≥ 0.90
BCNPA 236 CFL P5 WEB2	2xCFL 'L' 36/4P	240	0.311	--	≥ 0.95

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRES Making the difference</p>	DRAWN	KPM	08-05-2009	FOR -
	CHECKED	DVRS		REV - 0 DATE-12-05-2009
	APPROVED	CRR		DRG.No
	DATA SHEET RELEASED ON DT-			CNPA 236 CFL P5 - 001