




LEGEND

BCPA 236 CFL TD

BCPA 236 CFL TD WEB2

Recess mounted 2 x CFL 36W direct / indirect lighting luminaire

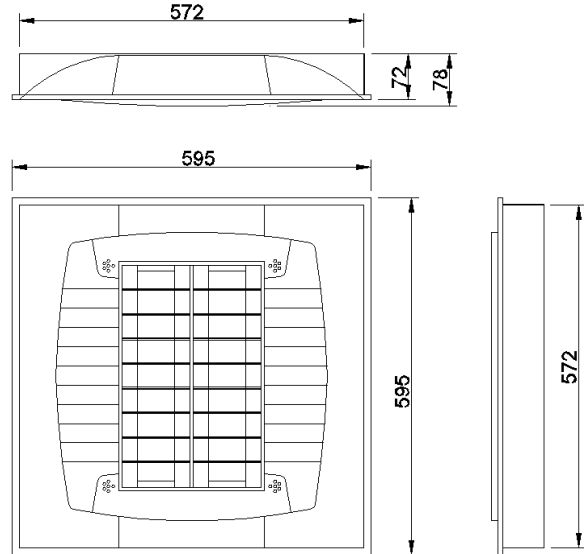

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

- Commercial Complexes, Showrooms,
- Airport Lounges, Computer Centers,
- Banks, Hospitals, Conference Halls,
- Design Offices, Control Rooms, Laboratories, etc.

Specification

- The Recess mounting luminaire comprises of CRCA sheet steel housing, complete with control gear, wired with new generation accessories up to terminal block.
- The luminaire provides glare free indirect light, with 3-D mirror Louver assembly in the center. Two coloured Engg. Plastic decorative side plates (Options of clear green, blue & orange), on each side, enhancing the aesthetics of luminaire.

Finish: Housing - Epoxy white powder coated.

Electrical Data

Product Code	Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. at 240 V	Capacitor Mfd.	Power Factor
161389	BCPA 236 CFL TD	2xCFL 'L' 36/4P	240	0.42	8	≥ 0.90
530322	BCPA 236 CFL TD WEB2	2xCFL 'L' 36/4P	240	0.311	--	≥ 0.95

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRES Making the difference</p>	DRAWN	VDS	11-05-2005	FOR - STD.
	CHECKED	DVRS		REV - 1 DATE-24-01-2008
	APPROVED	CRR		DRG.No
	DATA SHEET RELEASED ON DT-			CPA 236 CFL TD - 001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : luminaires@bajajelectricals.com