




AREA LIGHTING

BGEMF 150 MH DE

Asymmetrical beam, integral floodlight luminaire for double ended HID lamp

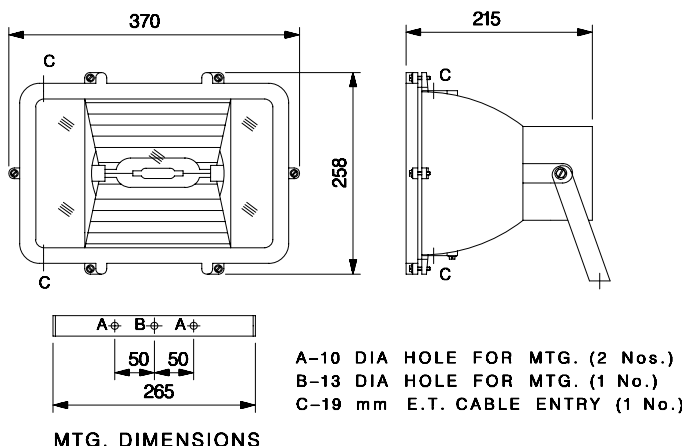

Nominal dimensions in mm Tolerance +/-5 (Except mtg. Hole)

Applications

- Pedestrian crossings
- Walkways and pathways
- Building & monuments
- Hoardings and sign boards
- Security lighting, etc.

Specification

- Epoxy grey powder coated, die-cast aluminium housing with control gear accessories suitable for 150 MH DE lamp
- Electrochemically brightened, polished, faceted **GLASKOTE™** aluminium reflector
- Heat resistant, toughened and clear glass cover in the front with hinged die-cast aluminium frame and silicon rubber gasket
- Pair of Rx 7s-24 lamp holders prewired upto the terminal block
- Epoxy grey powder coated MS mounting bracket, graduated aiming disc and locking facility at any angle in the vertical plane
- Degree of protection : IP 55

Electrical Data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. at 240 V	Capacitor Mfd.	Power Factor
BGEMF 150 MH DE	MH DE 150	220/240	0.80	20	≥ 0.85

Data subject to variation due to change/improvement in the design, materials and processes.

<p><b>BAJAJ LUMINAIRES</b> Making the difference</p>	DRAWN	VDS	13-06-2003	FOR - std.
	CHECKED	KS		REV - 0 DATE-07-03-2008
	APPROVED	CRR		DRG. No
	DATA SHEET RELEASED ON DT-			<b>EMF 150 MH DE-001</b>
<b>BAJAJ ELECTRICALS LIMITED</b> 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				E-mail : <a href="mailto:luminaires@bajajelectricals.com">luminaires@bajajelectricals.com</a>