




AREA LIGHTING

BGEMF 150 SV/MH

Asymmetrical beam, integral floodlight luminaire for tubular HID lamp

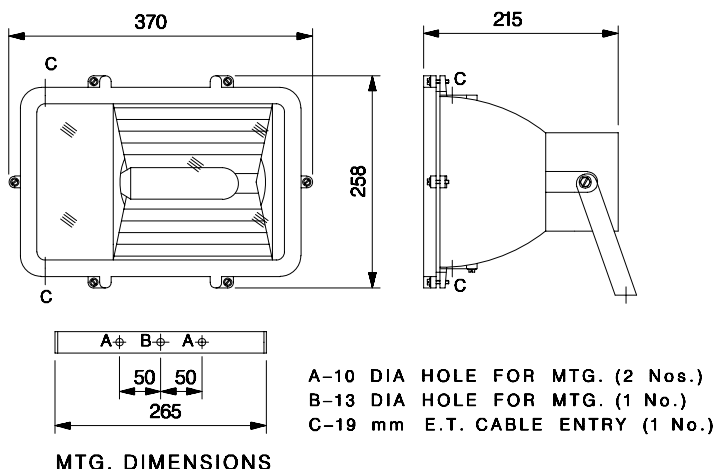

Nominal dimensions in mm Tolerance +/-5 (Except mtg. Hole)

Applications

- Pedestrian crossings
- Walkways and pathways
- Building & monuments
- Hoardings and sign boards
- Security lighting, etc.

Specification

- Epoxy gray powder coated, die-cast aluminium housing with control gear accessories suitable for 150 SV/MH tubular lamp
- Electrochemically brightened, polished, faceted **GLASKOTE™** aluminium reflector
- Heat resistant, toughened and clear glass cover in the front with hinged die-cast aluminium frame and silicon rubber gasket
- GES (E40) lamp holders prewired upto the terminal block
- Epoxy gray powder coated MS mounting bracket, graduated aiming disc and locking facility at any angle in the vertical plane
- Degree of protection : IP 55

Electrical Data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. at 240 V	Capacitor Mfd.	Power Factor
BGEMF 150 SV/MH	HPSV T 150	220/240	0.80	20	≥ 0.85

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRES Making the difference</p>	DRAWN	VDS	13-06-2003	FOR - std.
	CHECKED	KS		REV - 0 DATE-07-03-2008
	APPROVED	CRR		DRG. No
	DATA SHEET RELEASED ON DT-			EMF 150 SV - 001
<p>BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.</p>				<p>* E-mail : luminaires@bajajelectricals.com</p>