





AREA LIGHTING

BGEMF 70 MH DE

Asymmetrical beam, integral, compact floodlight luminaire for double ended HID lamp

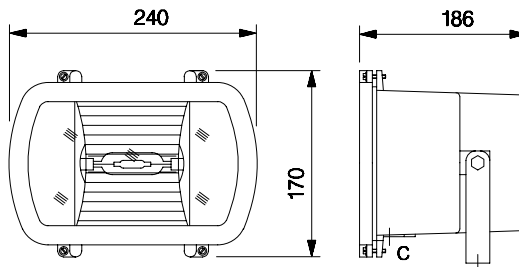

A-9 DIA HOLE FOR MTG. (2 Nos.)
 B-12 DIA HOLE FOR MTG. (1 No.)
 C-19 mm E.T. CABLE ENTRY (1 No.)

MTG. DIMENSIONS

Nominal dimensions in mm Tolerance +/-5 (Except mtg. Hole)

Applications

- Pedestrian crossings
- Walkways and pathways
- Building & monuments
- Hoardings and sign boards
- Security lighting, etc.

Specification

- Epoxy grey powder coated, die-cast aluminium housing with control gear accessories suitable for 70 MH DE lamp
- Electrochemically brightened, polished, faceted **GLASKOTE™** aluminium reflector
- Heat resistant, toughened and clear glass cover in the front with hinged die-cast aluminium frame and silicon rubber gasket
- Pair of Rx 7s lamp holders prewired upto the terminal block
- Epoxy grey powder coated MS mounting bracket, graduated aiming disc and locking facility at any angle in the vertical plane
- Degree of protection : IP 55

Electrical Data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. at 240 V	Capacitor Mfd.	Power Factor
BGEMF 70 MH DE	MH DE 70	220/240	0.40	10	≥ 0.85

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRES Making the difference</p>	DRAWN	VDS	08-12-2004	FOR -
	CHECKED	KS		REV - 0 DATE-07-03-2008
	APPROVED	CRR		DRG. No
	DATA SHEET RELEASED ON DT-			EMF 70 MH DE - 001