




AREA LIGHTING

BGENF 22

Asymmetrical beam, Non-integral floodlight luminaire upto twin 400W tubular HID lamp

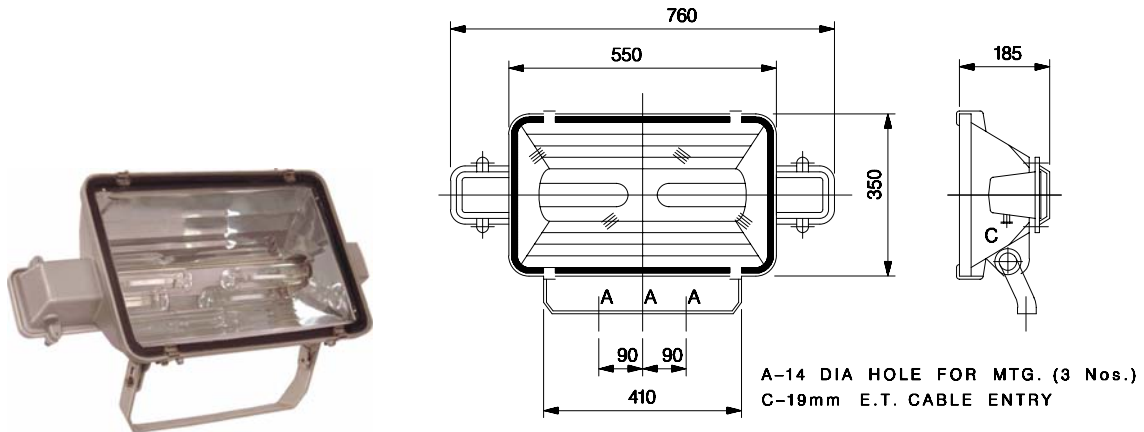

Nominal dimensions in mm Tolerance +/-5 (Except mtg. Hole)

Applications

- Industrial areas
- Multi purpose stadium
- Container berths
- Buildings and monuments
- Airport aprons
- Flyovers & bridges
- Railway marshalling yards.

Specification

- Epoxy grey powder coated, die-cast aluminium housing with heat dissipating fins
- Electrochemically brightened, polished, faceted **GLASKOTE™** aluminium reflector
- Heat resistant, clear toughened glass cover fixed to the housing with silicon rubber gasket and SS toggles
- GES (E40) lamp holder prewired upto the terminal block
- Epoxy grey powder coated MS mounting bracket, graduated aiming disc and locking facility at any angle in the vertical plane
- Degree of protection : IP 55

Note : Control gear box for appropriate wattage of HID lamp to be used

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRE Making the difference</p>	DRAWN	VDS	18.06-2003	FOR –
	CHECKED	KS		REV - 0 DATE-10-01-2008
	APPROVED	CRR		DRG. No
	DATA SHEET RELEASED ON DT-			ENF 22 - 001
<p>BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.</p>				<p>* E-mail : luminaires@bajajelectricals.com</p>