




ROADWAY LIGHTING

BAJAJ BGEST 150 SV/MH IP 65 FG

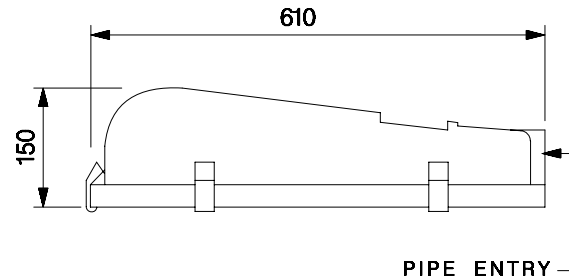

Max. width - 305

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

- Main roads
- Arterial roads
- Multi-level junctions
- Flyovers
- Civic centers, etc.

Specification

- Epoxy grey powder coated finish single piece die-cast aluminium housing for lamp and C.G. accessories
- Electrochemically brightened, polished and **GLASKOTE**™ finish computer aided pot optic aluminium reflector for tubular lamp
- A heat resistant toughened clear glass and EPDM rubber gasket fixed with SS toggles
- Control gear suitable for 150W HPSV/MH lamp,, GES (E40) lamp holder prewired upto the terminal block
- Side entry mounting suitable for 40 to 50 mm OD pipe bracket
- Degree of protection : IP 65

Electrical Data

| Cat. Ref. | Lamp Type & Wattage (W) | Nominal Voltage (V) | Mains Current in Amps. At 240 V | Capacitor Mfd. | Power Factor |
|----------------------|-------------------------|---------------------|---------------------------------|----------------|--------------|
| BGEST 150 SV IP65 FG | HPSV T 150 | 220/240 | 0.80 | 20 | ≥ 0.85 |
| BGEST 150 MH IP65 FG | MH 150 | 220/240 | 0.80 | 20 | ≥ 0.85 |

Data subject to variation due to change/improvement in the design, materials and processes.

| | | | | |
|---|-------------------------------------|-----|------------|---|
| BAJAJ LUMINAIRE <i>Making the difference</i> | DRAWN | VDS | 04-04-2008 | FOR - Std. |
| | CHECKED | KS | | REV - 0 DATE-04-04-2008 |
| | APPROVED | CRR | | DRG. No |
| | DATA SHEET RELEASED ON DT-Oct.-2004 | | | EST 150 SV IP65 FG - 001 |
| BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010. | | | | * E-mail : luminaires@bajajelectricals.com |