




ROADWAY LIGHTING

BGEST 150 SV

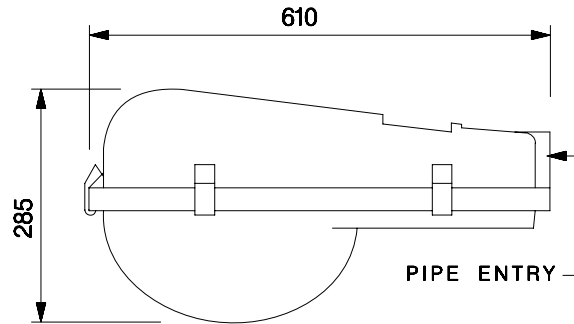

Max. width - 305

Nominal DIMENSIONS IN mm Tolerance +/-5

Application

- Main roads
- Arterial roads
- Multi-level junctions
- Flyovers
- Civic centers, etc.

Specification

- Epoxy grey powder coated single piece die-cast aluminium housing for lamp and control gear accessories
- Electrochemically brightened, polished and **GLASKOTE™** finish computer aided pot optic aluminium reflector for tubular lamp
- Highly transparent acrylic bowl with anti-moth treated felt gasket covering lamp and control gear fixed with SS toggles
- Control gear suitable for 150W SV lamp, GES (E40) lamp holder prewired upto the terminal block
- Side entry mounting suitable for 40 to 50 mm OD pipe bracket
- Degree of protection : IP 54

Electrical Data

Product code no.	Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. At 240 V	Capacitor Mfd.	Power Factor
184113	BGEST 150 SV	HPSV T 150	220/240	0.80	20	≥ 0.85

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRES Making the difference</p>	DRAWN	VDS	02-12-2004	FOR - Std.
	CHECKED	KS		REV - 0 DATE-11-01-2008
	APPROVED	CRR		DRG. No
	DATA SHEET RELEASED ON DT-			EST 150 SV - 001
<p>BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.</p>				<p>* E-mail : luminaires@bajajelectricals.com</p>