




ROADWAY LIGHTING

BAJAJ BGEST 250/400 SV IP 66 LH

MOMENTUM

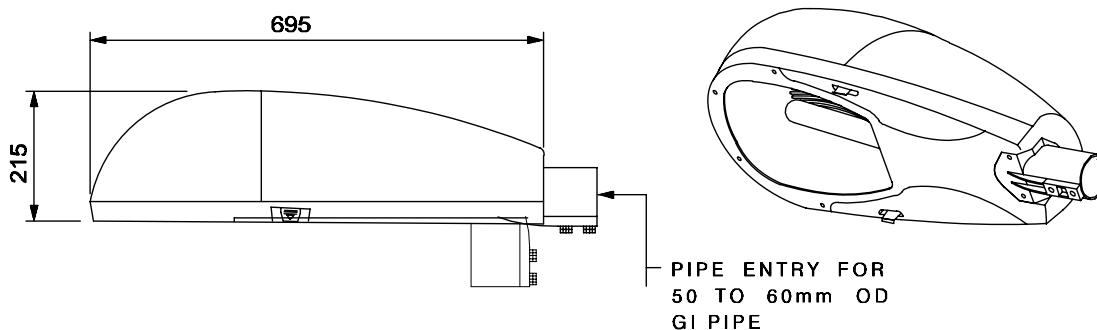

Max. width –325 mm

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

- Arterial roads
- Main roads
- Multi-level junctions
- Traffic roundabouts
- Civic centers

Specification

- Die-cast aluminium housing with EPDM gasket for lamp and control gear accessories
- Electrochemically brightened and polished and **GLASKOTE**™ finish computer aided pot optic aluminium reflector
- Cast aluminium cover for C.G.Housing compartment fixed with 2 nos. SS toggles
- Toughened clear glass for lamp housing compartment.
- GES adjustable lamp holder with cup
- Click fix connector arrangement.
- HPSV/MH ballast & CG Accessories
- Side entry mounting suitable for 50 to 60 mm OD pipe bracket
- Finish : Powder coated epoxy grey paint.
- Degree of protection : Lamp housing compartment IP 66
C. G. Housing compartment IP 55

Electrical Data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. At 240 V	Capacitor Mfd.	Power Factor
BGEST 250 SV IP66 LH	HPSV T 250	220/240	1.30	30	0.85
BGEST 400 SV IP66 LH	HPSV T 400	220/240	2.10	42	0.85

Data subject to variation due to change/improvement in the design, materials and processes.

 BAJAJ LUMINAIRES <i>Making the difference</i>	DRAWN	VDS	23-01-2003	FOR – std.
	CHECKED	KS		REV - 0 DATE–23-01-2003
	APPROVED	CRR		DRG. No
	DATA SHEET RELEASED ON DT-			EST 400 SV IP66 LH-001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : luminaires@bajajelectricals.com