




ROADWAY LIGHTING

BGEST 250 SV/MH IP65 SH FFG

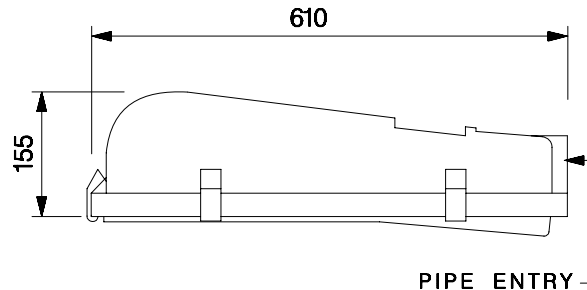

Max. width - 305

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

- Main roads
- Arterial roads
- Multi-level junctions
- Flyovers
- Civic centers, etc.

Specification

- Epoxy grey powder coated single piece die-cast aluminium housing weatherproof gasket for lamp and C.G. accessories
- Electrochemically brightened, polished and **GLASKOTE™** finish computer aided pot optic aluminium reflector for tubular lamp
- Cast aluminium frame with heat resistant toughened clear glass and EPDM rubber gasket fixed with SS toggles
- Control gear for 250W SV/MH lamp, GES (E40) lamp holder prewired upto the terminal block
- Side entry mounting suitable for 40 to 50 mm OD pipe bracket
- Degree of protection : IP 65

Electrical Data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. At 240 V	Capacitor Mfd.	Power Factor
BGEST 250 SV/MH IP65 SH FFG	HPSV / MH T 250	220/240	1.30	30	≥ 0.85

Data subject to variation due to change/improvement in the design, materials and processes.

 BAJAJ LUMINAIRES <i>Making the difference</i>	DRAWN	VDS	04-04-2008	FOR - Std.
	CHECKED	KS		REV - 0 DATE-04-04-2008
	APPROVED	CRR		DRG. No
	DATA SHEET RELEASED ON DT-			EST 150 SV/MH FFG - 001