




ROADWAY LIGHTING

BGEST 85 RF CFL FG

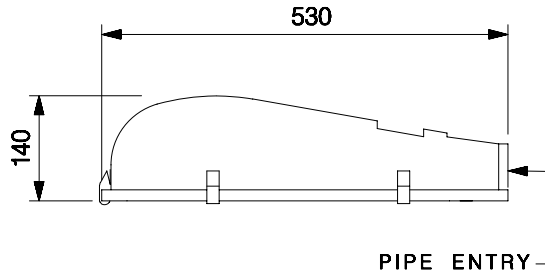

Max. width - 278

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

- Side roads
- Residential complexes
- Parks and gardens
- Small traffic roundabouts
- Security lighting, etc

Specification

- Epoxy grey powder coated single piece die-cast aluminum housing for retrofit CFL lamp
- Electrochemically brightened, polished and **GLASKOTE™** finish computer aided pot optic aluminum reflector for retrofit CFL lamp
- A heat resistant toughened clear glass and EPDM rubber gasket fixed with SS toggles
- 85W **RETROFIT** CFL lamp, BC/E27/E40 lamp holder prewired upto the terminal block
- Side entry mounting suitable for 40 to 50 mm OD pipe bracket
- Degree of protection: IP 65

Electrical Data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. At 240 V	Capacitor Mfd.	Power Factor
BGEST 85 RF CFL FG	RETROFIT CFL 85	240	0.40	---	----

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRES Making the difference</p>	DRAWN	VDS	04-04-2008	FOR – Std.
	CHECKED	KS		REV - 0 DATE-04-04-2008
	APPROVED	CRR		DRG. No
	DATA SHEET RELEASED ON DT-			EST 100 SV IP65 FG - 001
<p>BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.</p>				<p>* E-mail : luminaires@bajajelectricals.com</p>