




ROADWAY LIGHTING

BGQRGK 250 SV/MH

BGQRGK 400 SV/MH

CORAL

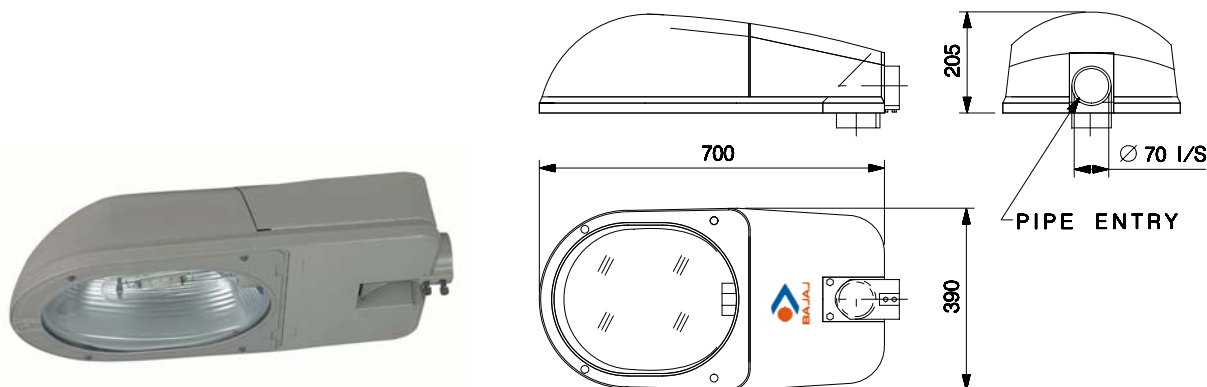

Nominal dimensions in mm Tolerance +/-5

Application

- Arterial roads
- Main roads
- Multi-level junctions
- Traffic roundabouts, etc.

Specification

- Epoxy grey powder coated die-cast aluminium housing, frame and top cover.
- Totally sealed lamp compartment with electrochemically brightened, polished and **GLASKOTE™** finish computer aided pot optic aluminium reflector.
- Heat resistant toughened clear glass.
- Synthetic rubber gasket.
- Control gear suitable for 250/400 SV/MH lamp, E-40 lamp holder prewired upto the terminal block.
- Side entry mounting suitable for 50 to 60 mm OD pipe bracket.
- Maintenance from top. Top cover to be open with the help of SS toggle for lamp & accessories maintenance.
- Degree of protection: IP 66 Lamp compartment
- Degree of protection: IP 54 Control gear compartment

Electrical Data

Product code no.	Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. At 240 V	Capacitor Mfd.	Power Factor
---	BGQRGK 250 SV	HPSV-T 250	220/240	1.30	30	≥ 0.85
---	BGQRGK 250 MH	MH-T 250	220/240	1.30	30	≥ 0.85
---	BGQRGK 400 SV	HPSV-T 400	220/240	2.10	42	≥ 0.85
---	BGQRGK 400 MH	MH-T 250	220/240	2.10	42	≥ 0.85

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRE Making the difference</p>	DRAWN	VDS	14-05-2008	FOR – Std.
	CHECKED	KS		REV - 0 DATE-19-09-2008
	APPROVED	CRR		DRG.No
	DATA SHEET RELEASED ON DT-			QRGK 250/400 SV - 001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : luminaires@bajajelectricals.com