




## ROADWAY LIGHTING

BAJAJ BGWRL 150 SV/MH FFG

WAVE

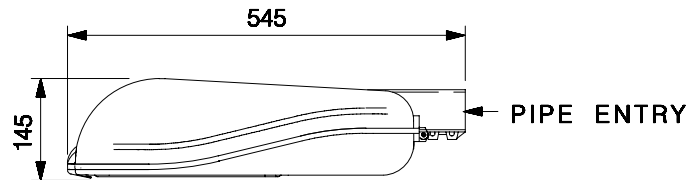

Max. width - 310

Nominal dimensions in mm Tolerance +/-5

## Applications

- Arterial roads
- Main roads
- Multi-level junctions
- Traffic roundabouts
- Civic centres, etc.

## Specification

- Epoxy cream powder coated die-cast aluminium bottom frame and cool blue powder coated top cover.
- Totally sealed lamp compartment with electrochemically brightened, polished and **GLASKOTE™** finish computer aided pot optic aluminium reflector.
- Heat resistant toughened clear glass. Curved glass can be provided on request.
- Synthetic rubber gasket.
- Control gear suitable for 150W SV/MH-T lamp, GES lamp holder prewired upto the terminal block.
- Side entry mounting suitable for 40 to 50 mm OD pipe bracket.
- Maintenance from bottom. Bottom frame to be open by unlocking the SS toggle for lamp & accessories maintenance.
- Degree of protection: IP 66 Lamp compartment
- Degree of protection: IP 54 Control gear compartment

## Electrical Data

Product code no.	Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. At 240 V	Capacitor Mfd.	Power Factor
180295	BGWRL 150 SV FFG	HPSV T 150	220/240	0.80	20	≥ 0.85
180439	BGWRL 150 MH FFG	MH T 150	220/240	0.80	20	≥ 0.85

Data subject to variation due to change/improvement in the design, materials and processes.

<p><b>BAJAJ LUMINAIRE</b> Making the difference</p>	DRAWN	VDS	07-10-2006	FOR - Std.
	CHECKED	KS		REV - 0 DATE-07-10-2006
	APPROVED	CRR		DRG. No
	DATA SHEET RELEASED ON DT-OCT.-2006			WRL 150 SV/MH FFG - 001
<b>BAJAJ ELECTRICALS LIMITED</b> 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : <a href="mailto:luminaires@bajajelectricals.com">luminaires@bajajelectricals.com</a>