




ACCESSORIES

BJCG 2x250/400 MV MS

BJCG 2x150/250/400 SV/MH MS

Heavy duty, weatherproof, Mild steel, control gear box for twin HID lamps

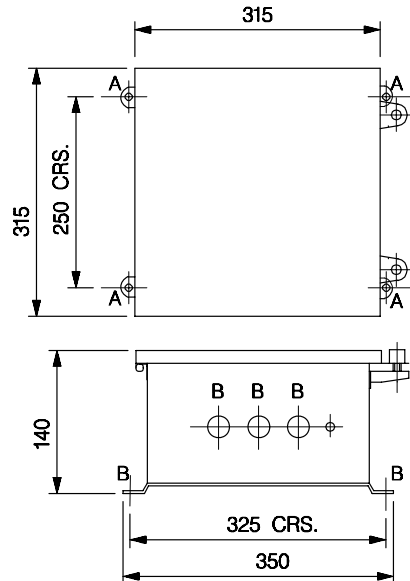

A-4 Nos.8 dia holes for mtg.

B-3 Nos.20 dia. knockouts holes

Dimensions in mm Tolerance +/-5 (Expect mtg. Hole)

Application

For use in all non-integral HID luminaires:

- Industrial lighting
- Area lighting
- Facade lighting

Specifications

- Epoxy grey powder coated M.S. (CRCA) box and hinged cover with rubber gasket
- Fitted with copper ballasts, capacitor, electronic ignitors suitable for twin 250/400W HPMV / 150/250/400 HPSV/MH lamps
- Porcelain rewirable fuse cutout and earthing terminal
- Prewired with PVC insulated copper wires upto the terminal block
- 3 nos. 20 mm dia. knock outs for cable entries
- Loop-in-loop-out facility
- Degree of protection : IP 55

Electrical Data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. at 240 V	Capacitor Mfd.	Power Factor
BJCG 2x250 MV MS	2xHPMV 250	200/220/240	2.60	2X15	≥ 0.85
BJCG 2x400 MV MS	2xHPMV 400	200/220/240	4.20	2X20	≥ 0.85
BJCG 2x150 SV/MH MS	2xHPSV 150	220/240	1.60	2X20	≥ 0.85
BJCG 2x250 SV/MH MS	2xHPSV/MH 250	220/240	2.60	2X30	≥ 0.85
BJCG 2x400 SV/MH MS	2xHPSV/MH 400	220/240	4.20	2X42	≥ 0.85

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRE Making the difference</p>	DRAWN	VDS	27-10-2004	FOR - std.
	CHECKED	KS		REV - 0 DATE-01-02-2008
	APPROVED	CRR		DRG. No
	DATA SHEET RELEASED ON DT-OCT.-2004			CG 2x150/250/400MS-001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : luminaires@bajajelectricals.com