




ACCESSORIES - DEEP DRAWN CG BOX

BJCG 80/125 MV DD

BJCG 70 SV/MH DD

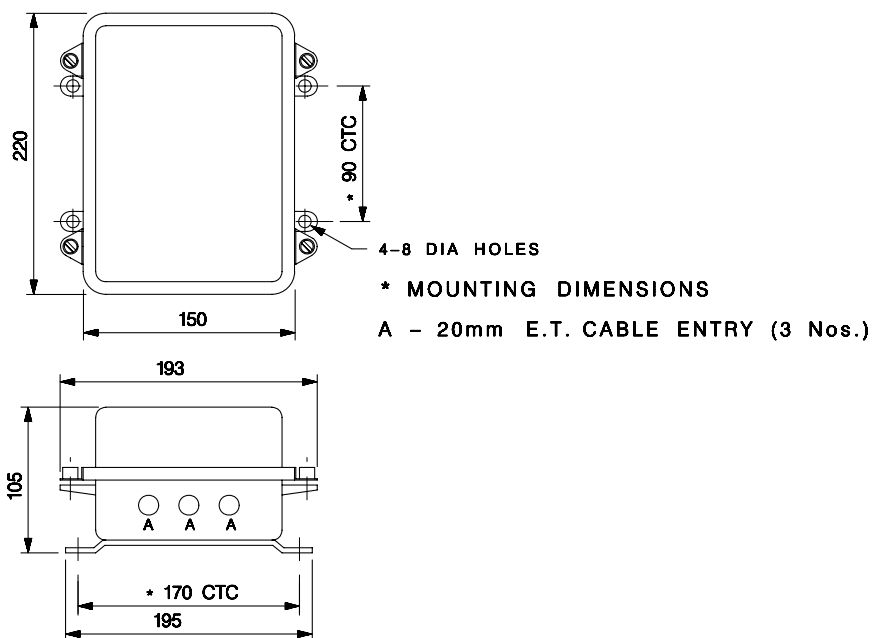

Dimensions in mm Tolerance +/-5

Application

For all non-integral HID luminaires:

- Industrial lighting
- Area lighting
- Façade lighting, etc.

Specification

- Epoxy grey powder coated, deep drawn CRCA steel sheet with hinged cover with rubber gasket
- Fitted with copper ballasts, capacitor, ignitor suitable for 80/125 HPMV / 70 HPSV/MH lamp
- Rewireable fuse cut-out and earthing terminal
- Prewired with PVC insulated copper wires upto the terminal block
- 3 Nos. cable entry provided for loop-in loop-out arrangement
- Degree of protection : IP 55

Note: The distance between non integral luminaire and C.G.Box should be less than 10 meters.

Electrical data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. At 240 V	Capacitor Mfd	Power Factor
BJCG 80 MV DD	HPMV 80	200/220/240	0.43	8.0	≥ 0.85
BJCG 125 MV DD	HPMV 125	200/220/240	0.69	10.0	≥ 0.85
BJCG 70 SV DD	HPSV 70	220/240	0.40	10.0	≥ 0.85

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRES Making the difference</p>	DRAWN	VDS	07-10-2006	FOR -
	CHECKED	KS		REV - 0 DATE-01-02-2008
	APPROVED	CRR		DRG. No
	DATA SHEET RELEASED ON DT-			CG 80/125/70 DD-001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : luminaires@bajajelectricals.com