




## COMMERCIAL DECORATIVE LIGHTING

BJDL 136/140

BAJAJ

BJDL 236/240 / BJDL 236/240 WEB2

Recess mounting, single / twin fluorescent lamp darklighter for luxalon ceiling

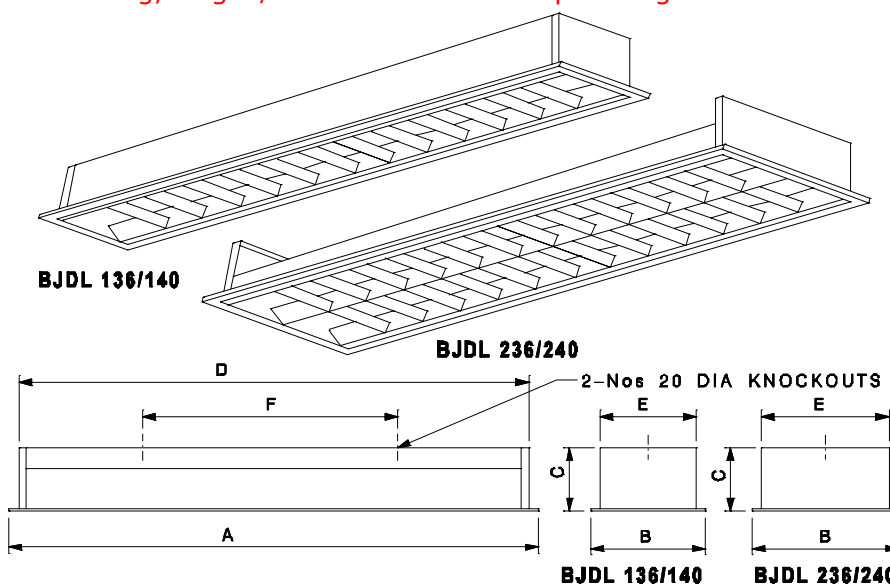

Nominal dimensions in mm Tolerance +/-5

Cat. Ref.	A	B	C	D	E	F
BJDL 136/140	1250	184	110	1227	162	600
BJDL 236/240	1250	284	98	1227	264	600
BJDL 236/240 WEB2	1250	284	98	1227	264	600

## Applications

- Banks & offices
- Computer centers
- Libraries
- Areas with video display units, etc.

## Specification

- Epoxy white powder coated CRCA sheet steel housing
- High quality pre-anodised aluminium double parabolic mirror reflector and louver assembly
- Louver fixing arrangement is push fit mechanism and suspended by two nylon strings for easy maintenance
- Accessories for single / twin 36/40 fluorescent lamp(s), prewired upto terminal block.
- Wired with open construction ballast / HF electronic ballast.

## Electrical Data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. at 240 V	Capacitor Mfd.	Power Factor
BJDL 136/140	FTL 1x36/40	240	0.22/0.23	4.00	≥ 0.85
BJDL 236/240	FTL 2x36/40	240	0.43/0.45	8.00	≥ 0.90
BJDL 236/240 WEB2	FTL 2x36/40	240	0.311	--	≥ 0.95

Data subject to variation due to change/improvement in the design, materials and processes.

 <b>BAJAJ LUMINAIRES</b> <i>Making the difference</i>	DRAWN	VDS	21-01-2005	FOR - STD.
	CHECKED	DVRS	21-01-2005	REV - 1 DATE-25-01-2008
	APPROVED	CRR	21-01-2005	DRG.No
	DATA SHEET RELEASED ON DT- JAN 2005			DL 140/240 - 001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : <a href="mailto:luminaires@bajajelectricals.com">luminaires@bajajelectricals.com</a>