




COMMERCIAL DECORATIVE LIGHTING

BJDR 218 SQ FR FFGL W2EB

BJDR 226 SQ FR FFGL WEB

Recess, decorative, twin horizontal lamp mounting CFL downlighters

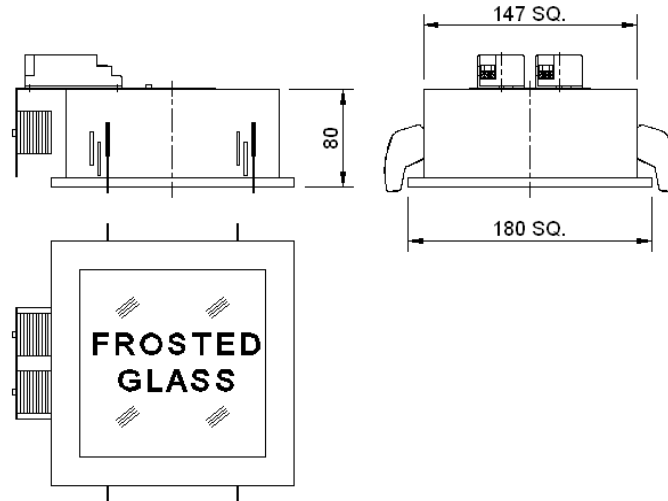

Nominal dimensions in mm Tolerance +/-5

Applications

- Commercial complexes
- Conference hall
- Corridors, passages & foyers
- Areas with video monitors / screens
- Hotels & restaurants
- Shops & show windows, etc.

Specification

- Suitable for twin 18/26W 'D' type CFLs
- Epoxy black powder coated CRCA sq. housing
- Anodised aluminium reflector
- Diffuser frosted glass (FG) provided for diffused light
- Epoxy white powder coated CRCA sq. frame
- Spring loaded latches for easy mounting.
- Easy to install and maintain
- Accessories for twin 18/26W CFLs, Wired with electronic ballast prewired upto terminal block.

Electrical Data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. at 240 V	Power factor
BJDR 218 SQ FR FFGL W2EB	2 x CFL 18	240	2 x 0.08	≥ 0.95
BJDR 226 SQ FR FFGL WEB	2 x CFL 26	240	0.228	≥ 0.95

Data subject to variation due to change/improvement in the design, materials and processes.

	DRAWN	KPM	07-05-2008	FOR - STD.
	CHECKED	DVRS		REV - 0 DATE-07-05-2008
	APPROVED	CRR		DRG.No
	DATA SHEET RELEASED ON DT-			DR 218 SQ FR FFGL W2EB- 001