




INDUSTRIAL LIGHTING

BAJAJ BJDWIS 80/125 MV / 70/100 SV

Integral wellglass luminaire for HID lamp

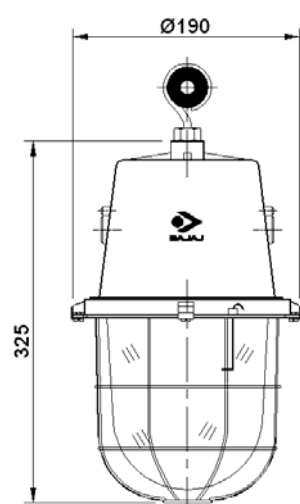

Dimensions in mm Tolerance +/-5

Application

- Thermal power stations
- Fertilizer plants
- Pelletising plants
- Cement factories
- Paper mills, Industrial bays, etc.

Specifications

- Pressure die cast aluminium lamp housing, epoxy grey Powder coated finish.
- Heat resistant wellglass with specially designed gasket.
- Built in control gear for 80/125 MV / 70/100W SV lamp.
- Built in MS reflector.
- BC/ES lamp holder, prewired upto the terminal block.
- Eye bolt with antivibration rubber pad is provided for suspension mounting.
- 2 nos. cable entries of size 20 mm ET are provided.
- Degree of protection : IP 65

Electrical Data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. At 240 V	Capacitor Mfd.	Power Factor
BJDWIS 80 MV	HPMV 80	200/220/240	0.43	08	≥ 0.85
BJDWIS 125 MV	HPMV 125	200/220/240	0.69	10	≥ 0.85
BJDWIS 70 SV	HPSV 70	220/240	0.40	10	≥ 0.85
BJDWIS 100 SV	HPSV 100	220/240	0.50	15	≥ 0.85

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRES Making the difference</p>	DRAWN	VDS	05-09-2005	FOR - STD.
	CHECKED	KS		REV - 0 DATE-10-02-2009
	APPROVED	CRR		DRG. No
	DATA SHEET RELEASED ON DT-			DWIS 80/125/70/100 - 001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : luminaires@bajajelectricals.com