




ROADWAY LIGHTING

BJEST 04 250 SV DD

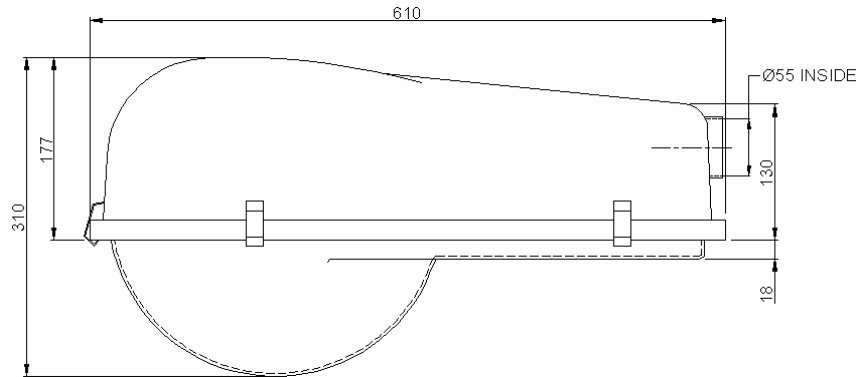

Max. Width = 310 mm

Dimensions in mm Tolerance +/-5

Application

- Arterial roads
- Main roads
- Multi-level junctions
- Traffic round-about
- Civic centers

Specification

- Single piece sheet aluminium epoxy grey powder coated built in reflector housing for lamp and control gear
- Highly transparent acrylic bowl fixed to the housing with anti-moth treated felt gasket with SS toggles
- Control gear suitable for 250W SV lamp, GES lamp holder prewired upto the terminal block
- Side entry mounting suitable for 40 to 50 mm OD pipe bracket
- Degree of protection: IP 54

Electrical Data

Product code no.	Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. At 240 V	Capacitor Mfd.	Power Factor
162225	BJEST 04 250 SV DD	HPSV 250	220/240	1.30	30	≥ 0.85

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRES Making the difference</p>	DRAWN	VDS	31-07-2007	FOR – Std.
	CHECKED	KS		REV - 0 DATE-31-07-2007
	APPROVED	CRR		DRG. No
	DATA SHEET RELEASED ON DT-			JEST 04 250 SV DD - 001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : luminaires@bajajelectricals.com