




HAZARDOUS AREA LIGHTING FLAMEPROOF WELLGLASS NON INTEGRAL

BAJAJ BJFW 250 MV NI / BJFW 150 SV/MH NI

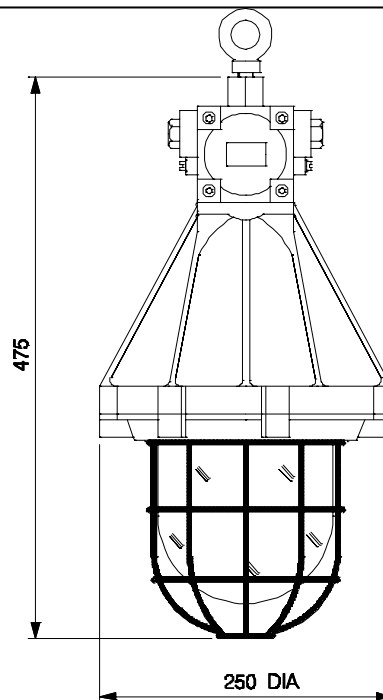

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Specification

DESCRIPTION: Flame proof weatherproof non integral wellglass suitable for 250 MV/150 HPSV/MH / 300 GLS Lamp at 250 V AC MAX.

MATERIAL: Cast Aluminium LM 6.

GLASS: Heat resistant and toughened wellglass.

CABLE ENTRY: 2 way 3/4" B.S.Conduit.

HOLDER: GES Holder is provided as standard.

SUSPENSION: Eye bolt.

HINGING: M.S. Chain is provided.

GASKET: Neoprene.

IP RATING: IP 65

FINISH: Light grey (631 Shade IS 5) paint. / Epoxy optional at extra cost.

STANDARD: IS 2148 & IS 2206 (part I)

GROUPS: I, II A & II B as per IS 2148 / **ZONE** - 2

CMRI. CERT. No. : C.M.R.I./T.C./H429 dt. 23rd Oct. 1997.

CIMFR/TC/SR/H840 dt. 24th January 2008.

CIMFR/TC/S/693 dt. 19th November 2008.

TEMP. CLASS : 250W MV 'Y' T3, 150W HPSV/MH 'T4'.

Note: Separate control gear in an approved enclosure is required for 250 MV / 150 HPSV/MH lamp.

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRE Making the difference</p>	DRAWN	VDS	16-11-2004	FOR – Std.
	CHECKED	CRR		REV - 0 DATE-16-11-2004
	APPROVED	CRR		DRG.No
	DATA SHEET RELEASED ON DT-			FW 250 MV NI - 001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : luminaires@bajajelectricals.com