




HAZARDOUS AREA LIGHTING
 INCREASED SAFETY WELLGLASS NON-INTEGRAL

BAJAJ BJISW 250 MV (NI)

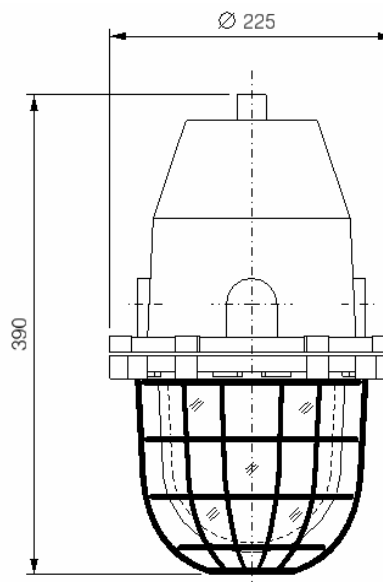

Nominal dimensions in mm - Tolerance +/-5

Specification

DESCRIPTION: Increased safety weatherproof non-integral wellglass suitable for 250W HPMV, 150W HPSV lamp at 240 Volts (max.)

MATERIAL: Cast Aluminium LM 6.

GLASS: Heat resistant wellglass.

CABLE ENTRY: 3 way 3/4" B.S.Conduit.

HOLDER: E40 GES lamp Holder is provided as standard.

MOUNTING: Eye bolt

GASKET: Neoprene.

IP RATING: IP 65

FINISH: Light grey (631 Shade IS5) paint / Epoxy optional at extra cost.

STANDARD: IS: 6381 - 1972 / IS: 8224 - 1976

GROUPS: Zone 2

CMRI. CERT. No.: C.M.R.I./T.C./P/H1260 dated. 14th Oct. 1999

C.M.R.I./T.C./ADDEN/H193 dated. 16th Feb. 2000

TEMP. CLASS: 250W MV `T5`

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRES Making the difference</p>	DRAWN	kpm	15-03-2000	FOR – Std.
	CHECKED	VDS		REV - 0 DATE-15-03-2000
	APPROVED	CRR		DRG.No
	DATA SHEET RELEASED ON DT-			ISW 250 MV NI – 001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : luminaires@bajaelectricals.com