




COMMERCIAL DECORATIVE LIGHTING

BJMMA 02 236/240 DL

BJMMA 02 236/240 DL WEB2

Recess mounting square modular, twin fluorescent lamp darklighter for **Armstrong** ceiling

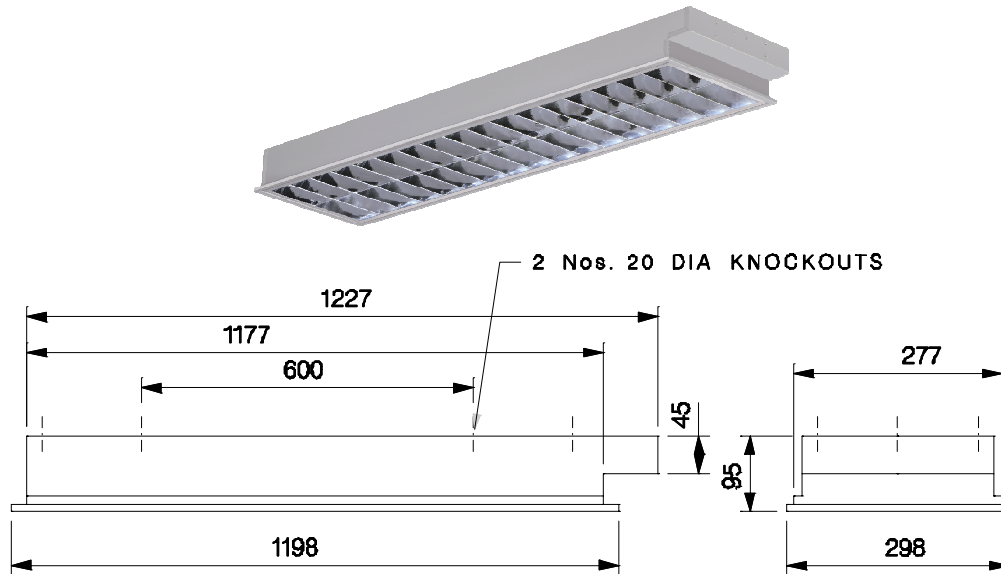

Nominal dimensions in mm Tolerance +/-5

Applications

- Airport lounges
- Banks & offices
- Control rooms
- Departmental stores
- Libraries
- Hospitals & laboratories, etc.

Specification

- Epoxy white powder coated CRCA sheet steel housing
- High quality pre-anodised aluminium double parabolic mirror reflector and louver assembly.
- Louver fixing arrangement is push fit mechanism and suspended by two nylon strings for easy maintenance
- Accessories for twin 36/40 fluorescent lamp(s), prewired upto terminal block.
- Wired with open construction / HF electronic ballast.

Electrical Data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. at 240 V	Capacitor Mfd.	Power Factor
BJMMA 02 236/240 DL	FTL 2x36/40	240	0.43/0.45	8.00	≥ 0.90
BJMMA 02 236/240 DL WEB2	FTL 2x36/40	240	0.311	--	≥ 0.95

Data subject to variation due to change/improvement in the design, materials and processes.

	DRAWN	VDS	22-01-2005	FOR - STD.
	CHECKED	DVRS	22-01-2005	REV - 1 DATE-25-01-2008
	APPROVED	CRR	22-01-2005	DRG.No
	DATA SHEET RELEASED ON DT-JAN 2005			MMA 02 240 DL - 001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : luminaires@bajajelectricals.com