




COMMERCIAL DECORATIVE LIGHTING

BJMMA 02 418

BJMMA 02 418 WEB4

Recess mounting square modular quadruple fluorescent lamp mirror optics luminaire
for **Armstrong** ceiling

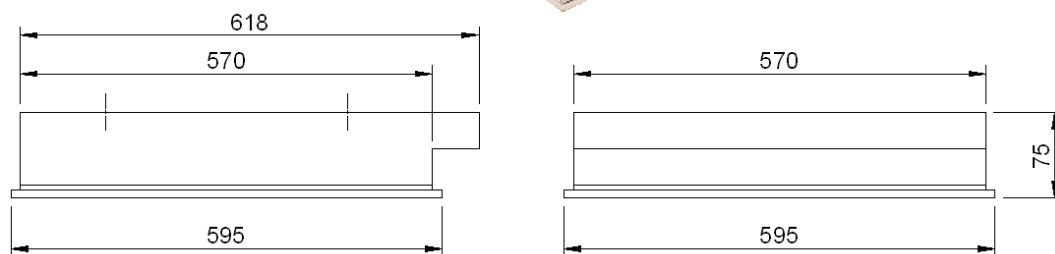

Nominal dimensions in mm Tolerance +/-5

Applications

- Airport lounges
- Banks & offices
- Control rooms
- Conference halls
- Hospitals & laboratories, etc.

Specification

- Epoxy white powder coated CRCA sheet steel square housing
- High quality pre-polished aluminium parabolic reflector and serrated matt anodised aluminium extruded baffles. (aluminium reflector with specular film permanently bonded to eliminate effect of iridescence & for increased efficiency.)
- Louver fixing arrangement is push fit mechanism and suspended by two nylon strings for easy maintenance
- Accessories for quadruple 18W fluorescent lamps, prewired upto terminal block.
- Wired with open construction / HF electronic ballast.

Electrical Data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. at 240 V	Capacitor Mfd.	Power Factor
BJMMA 02 418	FTL 4x18	240	0.43	8.00	≥ 0.90
BJMMA 02 418 WEB4	FTL 4x18	240	0.311	--	≥ 0.95

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRES Making the difference</p>	DRAWN	VDS	22-01-2005	FOR - STD.
	CHECKED	DVRS	22-01-2005	REV - 1 DATE-25-01-2008
	APPROVED	CRR	22-01-2005	DRG.No
	DATA SHEET RELEASED ON DT-JAN 2005			MMA 02 418 - 001