





ROADWAY LIGHTING

BJMSC 02 70 SV

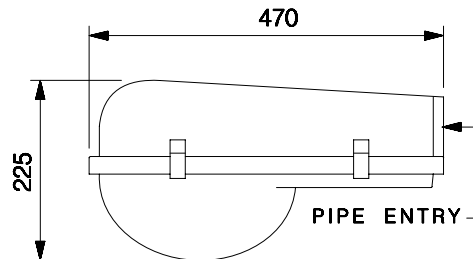

Max. width - 218

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

- Side roads
- Residential complexes
- Parks and gardens
- Small traffic roundabouts
- Security lighting, etc

Specification

- Grey hammertone outside and white inside single piece die-cast aluminium housing for lamp and control gear accessories
- Electrochemically brightened, polished and anodised aluminium side reflectors
- Highly transparent acrylic bowl with anti-moth treated felt gasket covering lamp and control gear fixed with SS toggles
- Control gear for 70W SV lamp, ES lamp holder prewired upto the terminal block
- Side entry mounting suitable for 40 to 50 mm OD pipe bracket
- Connector is provided
- Degree of protection : IP 54

Electrical Data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. At 240 V	Capacitor Mfd.	Power Factor
BJMSC 02 70 SV	HPSV 70	220/240	0.40	10	≥ 0.85

Data subject to variation due to change/improvement in the design, materials and processes.

 BAJAJ LUMINAIRES <i>Making the difference</i>	DRAWN	VDS	22-08-2003	FOR - std.
	CHECKED	KS		REV - 0 DATE-11-01-2008
	APPROVED	CRR		DRG. No
	DATA SHEET RELEASED ON DT-			MSC 02 70 SV - 001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : luminaires@bajajelectricals.com