




## ROADWAY LIGHTING

BJMSD T 03 80 MV IP65

BJMSD T 03 70 SV/MH IP65

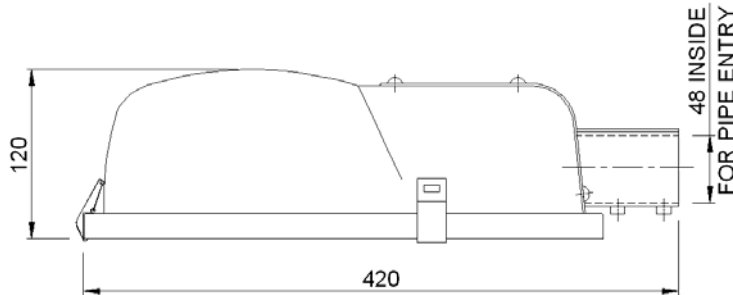

Max. Width = 205mm

NOMINAL DIMENSIONS IN mm Tolerance +/-5

## Application

- Side roads
- Residential complexes
- Parks and gardens
- Small traffic roundabouts
- Security lighting, etc

## Specification

- Electrochemically brightened single piece sheet aluminium built-in reflector housing with sand blasted finish outside.
- Clear toughened glass for lamp and C.G.accessories, fixed with .SS toggles.
- Control gear for 80W MV/70W SV/MH lamp.
- ES/BC lamp holder prewired upto terminal block
- Side entry mounting suitable for 40mm OD pipe bracket
- Degree of protection : IP 65

## Electrical Data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. At 240 V	Capacitor Mfd.	Power Factor
BJMSD T 03 80 MV IP65	HPMV 80	200/220/240	0.43	8	≥ 0.85
BJMSD T 03 70 SV/MH IP65	HPSV/MH 70	220/240	0.40	10	≥ 0.85

Data subject to variation due to change/improvement in the design, materials and processes.

	DRAWN	KPM	28-04-2008	FOR -
	CHECKED	KS		REV - 0 DATE-28-04-2008
	APPROVED	CRR		DRG.No
	DATA SHEET RELEASED ON DT-			MSDT 03 70 SV IP65 - 001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : <a href="mailto:luminaires@bajajelectricals.com">luminaires@bajajelectricals.com</a>