




ROAD LIGHTING LUMINAIRE

BJMSD 02 70 SV

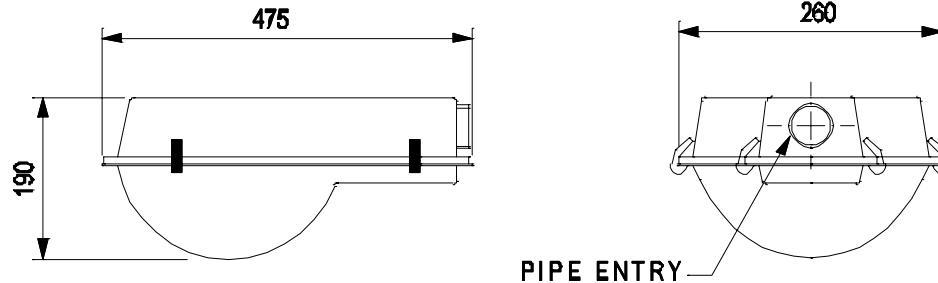

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Applications

- Side roads
- Residential roads
- Small traffic roundabouts
- Security lighting, etc.

Specification

- Hydro formed sheet aluminium housing in Stove enamelled grey hammertone outside and white Inside.
- Electrochemically brightened and **anodised** aluminium side reflectors
- Clear acrylic bowl with anti-moth treated felt gasket fixed to the housing by SS toggles
- Control gear suitable for 70W HPSV lamp, ES lamp holder prewired upto the terminal block, to be wired with new 70W open construction ballast
- Side entry mounting suitable for 40 to 50 mm OD pipe bracket
- Degree of protection : IP 54

Electrical Data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. at 240 V	Capacitor Mfd.	Power Factor
BJMSD 02 70 SV	HPSV 70	220/240	0.40	10	0.85

Data subject to variation due to change/improvement in the design, materials and processes.

	DRAWN	VDS	19-09-2003	FOR –
	CHECKED	KS		REV-0 DATE-19-09-2008
	APPROVED	CRR		DRG.No
	DATA SHEET RELEASED ON DT-			MSD 02 70 SV - 001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : luminaires@bajajelectricals.com