




INDUSTRIAL LIGHTING

BJRLB 02 80/125 MV

BAJAJ BJRLB 02 70 SV/MH DE/SE

Lowbay, integral, horizontal ceiling mounted HID lamp luminaire

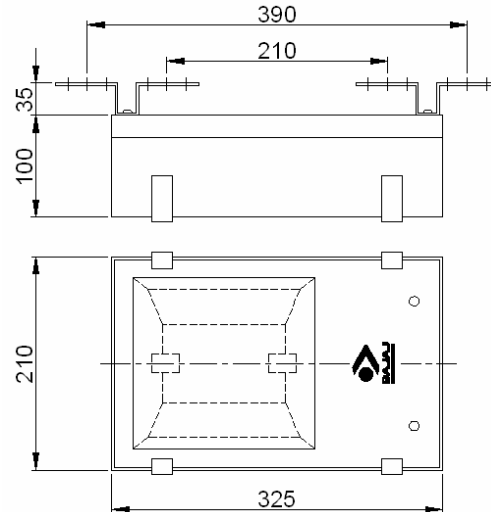

Dimensions in mm Tolerance +/-5

Applications

- Industrial bays.
- Warehouses
- Railway platforms
- Constructed tunnels
- Circulation areas, etc.

Specification

- Epoxy white powder coated CRCA sheet steel housing
- Anodized aluminium reflector assembly
- Heat resistant, toughened clear glass, gasket fixed to the housing with toggles.
- Control gear for 80/125W MV / 70W SV/MH DE/SE lamp.
- BC/ES/Pair of Rx 7s lamp holder, prewired upto the terminal block.
- Degree of protection: IP 54

Note: recommended mounting height: 4 to 6 meters

Electrical Data

| Product code no. | Cat. Ref. | Lamp Type & Wattage (W) | Nominal Voltage (V) | Mains Current In Amps. At 240 V | Capacitor Mfd. | Power Factor |
|------------------|-------------------|-------------------------|---------------------|---------------------------------|----------------|--------------|
| 162405 | BJRLB 02 70 SV | HPSV 70 | 220/240 | 0.40 | 10 | ≥ 0.85 |
| 162409 | BJRLB 02 70 MH DE | MH DE 70 | 220/240 | 0.40 | 10 | ≥ 0.85 |
| 162410 | BJRLB 02 70 MH SE | MH SE 70 | 220/240 | 0.40 | 10 | ≥ 0.85 |
| 162407 | BJRLB 02 80 MV | HPMV 80 | 200/220/240 | 0.43 | 8 | ≥ 0.85 |
| 162408 | BJRLB 02 125 MV | HPMV 125 | 200/220/240 | 0.69 | 10 | ≥ 0.85 |

Data subject to variation due to change/improvement in the design, materials and processes.

| | | | | |
|---|----------------------------|-----|------------|---|
| <p>BAJAJ LUMINAIRE Making the difference</p> | DRAWN | VDS | 21-10-2007 | FOR – Std. |
| | CHECKED | KS | | REV - 0 DATE-21-10-2007 |
| | APPROVED | CRR | | DRG. No |
| | DATA SHEET RELEASED ON DT- | | | RLB 02 70 SV/MH - 001 |
| BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010. | | | | * E-mail : luminaires@bajajelectricals.com |