




INDUSTRIAL LIGHTING

BAJAJ BJRMB 150 MH DE/SE

Lowbay, integral, horizontal ceiling mounted HID lamp luminaire

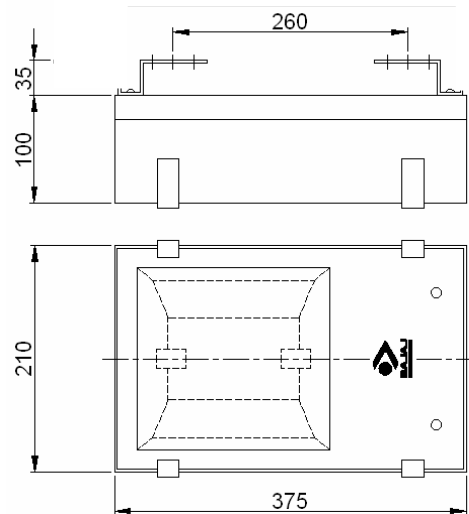

Dimensions in mm Tolerance +/-5

Applications

- Industrial bays.
- Warehouses
- Railway platforms
- Constructed tunnels
- Circulation areas, etc.

Specification

- Epoxy white powder coated CRCA sheet steel housing
- Anodized aluminium reflector assembly
- Heat resistant, toughened clear glass, gasket fixed to the housing with toggles.
- Control gear for 150W MH DE/SE lamp.
- ES (E 27) / pair of Rx 7s-24 lamp holder, prewired upto the terminal block.
- Degree of protection: IP 54

Note: recommended mounting height: 6 to 8 meters

Electrical Data

| Product code no. | Cat. Ref. | Lamp Type & Wattage (W) | Nominal Voltage (V) | Mains Current In Amps. At 240 V | Capacitor Mfd. | Power Factor |
|------------------|-----------------|-------------------------|---------------------|---------------------------------|----------------|--------------|
| 162412 | BJRMB 150 MH DE | MHDE 150 | 220/240 | 0.80 | 20 | ≥ 0.85 |
| 162645 | BJRMB 150 MH SE | MHSE 150 | 220/240 | 0.80 | 20 | ≥ 0.85 |

Data subject to variation due to change/improvement in the design, materials and processes.

| | | | | |
|---|----------------------------|-----|------------|-------------------------------|
| <p>BAJAJ LUMINAIRE Making the difference</p> | DRAWN | VDS | 28-10-2007 | FOR – Std. |
| | CHECKED | KS | | REV - 0 DATE-28-10-2007 |
| | APPROVED | CRR | | DRG. No |
| | DATA SHEET RELEASED ON DT- | | | RMB 150 MH DE/SE - 001 |