




INDUSTRIAL LIGHTING

BJRMB 250 SV/MH GLASS

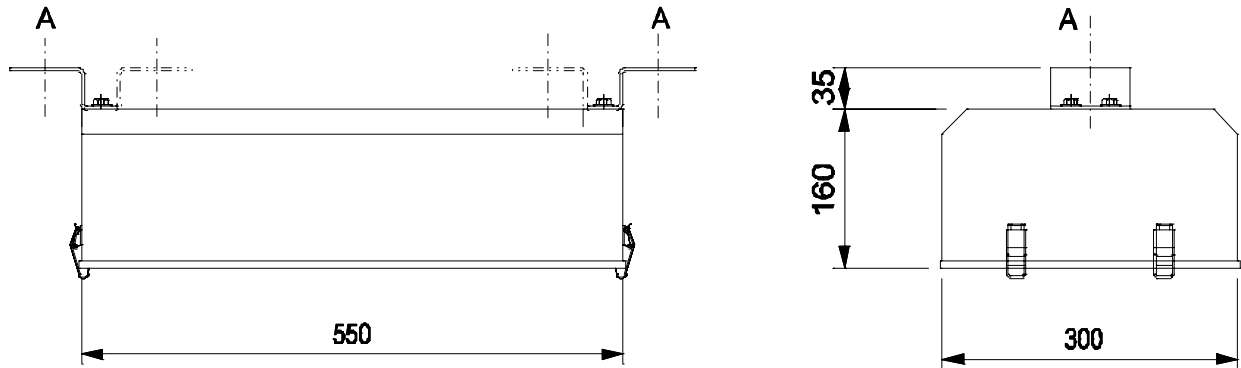

A = 19 mm DIA HOLES FOR MOUNTING - 2 Nos.

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

Compact high efficiency ceiling mounting luminaire suitable for single 250W HPSV/MH lamp and ideally suited for lighting of Public waiting halls of railway, Cargo and baggage handling areas of airport, Warehouses and industrial sheds.

Specification

The luminaire consists of CRCA sheet steel housing, complete with control gear wired upto terminal block.

Excellent optical control is achieved by computer aided designed reflector made of high purity anodised aluminium sheet giving high light output with improved spread and uniformity.

Glass cover encloses the housing. It can be hinged for easy maintenance/relamping.

Finish: Housing-Epxy white powder coated.

Electrical Data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current at 240 V in Amps.	Capacitor Mfd.	Power factor
BJRMB 250 SV/MH GLASS	HPSV/MH 250	220/240	1.30	30	0.85

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRE Making the difference</p>	DRAWN	VDS	20-01-2004	FOR –
	CHECKED	AAS	20-01-2004	REV-0 DATE-20-01-2004
	APPROVED	CRR	20-01-2004	DRG.No
	DATA SHEET RELEASED ON DT-			RMB 250 SV G - 001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : luminaires@bajajelectricals.com