




ROADWAY LIGHTING

BJSFLF 236 CFL

BJSFLF 236 CFL WEB2

Compact fluorescent lamp luminaire for group B2 roadway installation

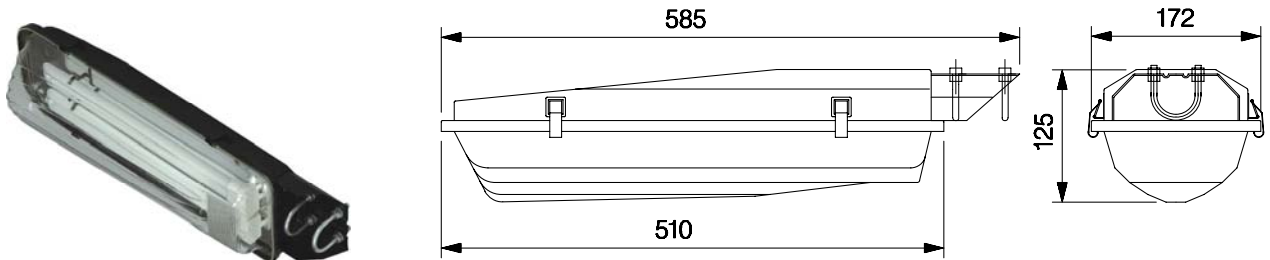

Dimensions in mm Tolerance +/-5

Application

- Lanes and by-lanes
- Residential colonies
- Industrial complexes
- Park and gardens
- Security lighting, etc.

Specification

- Epoxy black powder coated CRCA sheet steel housing
- Epoxy white powder coated CRCA sheet steel gear tray covered with anodised aluminium reflector
- Accessories for twin 36W CFLs prewired upto the terminal block
- Clear acrylic cover with rubber gasket fixed by toggles
- Side entry mounting - 2 Nos. U bolts for 30 mm OD pipe bracket
- Wired with open construction / HF electronic ballast.
- Degree of protection: IP 54

Electrical Data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. at 240 V	Capacitor Mfd.	Power Factor
BJSFLF 236 CFL	2xCFL 36	240	0.42	8	0.90
BJSFLF 236 CFL WEB2	2xCFL 36	240	0.311	----	0.95

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRES Making the difference</p>	DRAWN	VDS	22-02-2005	FOR – Std.
	CHECKED	DVRS		REV - 0 DATE-04-01-2008
	APPROVED	CRR		DRG. No
	DATA SHEET RELEASED ON DT-			SLF 236 CFL - 001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : luminaires@bajajelectricals.com