




## ROADWAY LIGHTING

## BJSFLF 336 CFL MS

Energy efficient roadway luminaire suitable for 3x36 CFL lamps

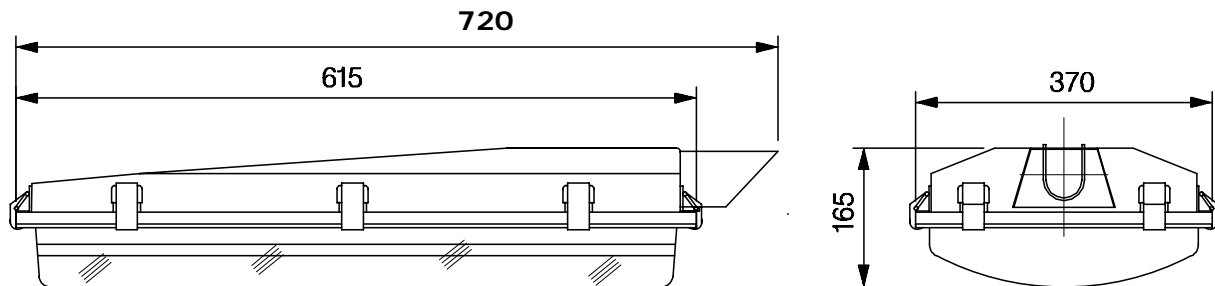

Dimensions in mm Tolerance +/-5

## Applications

- Major city road
- Secondary Roads
- Roundabouts
- Industrial complexes
- Residential colonies
- Car parks, etc.

## Specification

- Epoxy black powder coated finish CRCA sheet steel housing.
- Epoxy white powder coated CRCA sheet steel gear tray covered with anodised aluminium reflector.
- Accessories such as ballast, lamp holders are prewired upto the terminal block and mounted on a easily detachable gear tray.
- Clear acrylic cover with rubber gasket fixed by toggles.
- Side entry mounting - 2 Nos. U bolts for 50 mm OD pipe bracket.
- Degree of protection : IP 55

## Electrical Data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. at 240 V	Capacitor Mfd.	Power Factor
BJSFLF 336 CFL MS	3 x CFL 36	240	0.63	8 + 4	0.90

Data subject to variation due to change/improvement in the design, materials and processes.

<p><b>BAJAJ LUMINAIRES</b> Making the difference</p>	DRAWN	VDS	15-04-2008	FOR – Std.
	CHECKED	DVRS		REV - 0 DATE-15-04-2008
	APPROVED	CRR		DRG. No
	DATA SHEET RELEASED ON DT-			<b>SLF 336 CFL MS-001</b>