



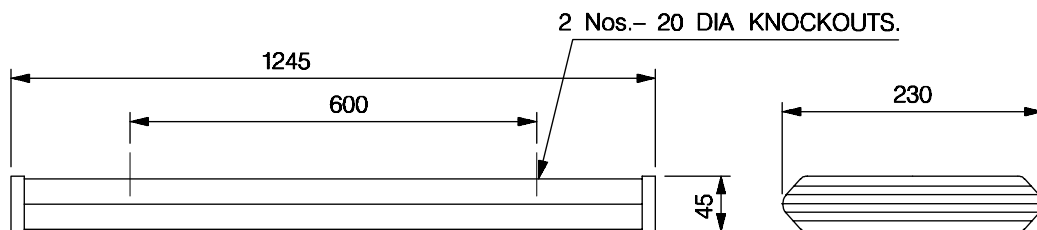

## DECORATIVE LIGHTING

BJSM 02 236/240

BJSM 02 236/240 WEB2

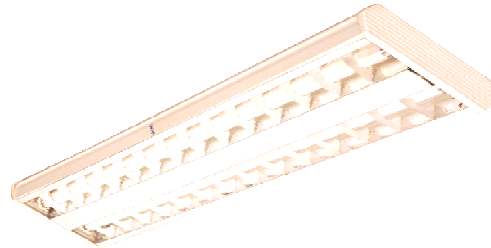

NOMINAL DIMENSIONS IN mm Tolerance +/-5

## Application

Interior illumination of Commercial complexes, Showrooms, Airport lounges, Computer centers, Banks, Hospitals, Conference halls, Toolrooms, Design offices, Control rooms, Laboratories, etc.

## Specification

- The Surface mounting luminaire comprises of a compact CRCA sheet steel housing in which all accessories along with ballast are mounted and wiring is terminated on to a terminal block. Excellent optical control is achieved by specially designed mirror system comprising
- Mirror made of high purity anodised aluminium sheet, giving a very high light out-put with wide spread light distribution.
- Aluminium sereted matt anodised transverse fins to control glare.
- Reflector assembly is securely held to the main body with four spring loaded trigger latches. Two nylon strings are provided to suspend the reflector assembly to facilitate easy maintenance and relamping.
- Wired with open construction ballast / HF electronic ballast.
- Finish: Housing white powder coating.

## Electrical Data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. at 240 V	Capacitor Mfd.	Power Factor
BJSM 02 236/240	2x36/40	240	0.43/0.45	8.00	≥ 0.90
BJSM 02 236/240 WEB2	2x36/40	240	0.311	--	≥ 0.95

Data subject to variation due to change/improvement in the design, materials and processes.

<p><b>BAJAJ LUMINAIRE</b> Making the difference</p>	DRAWN	VDS	04-02-2004	FOR - STD.
	CHECKED	AAS	04-02-2004	REV - 1 DATE-25-01-2008
	APPROVED	CRR	04-02-2004	DRG.No
	DATA SHEET RELEASED ON DT-			<b>SM 02 236/240 - 001</b>