



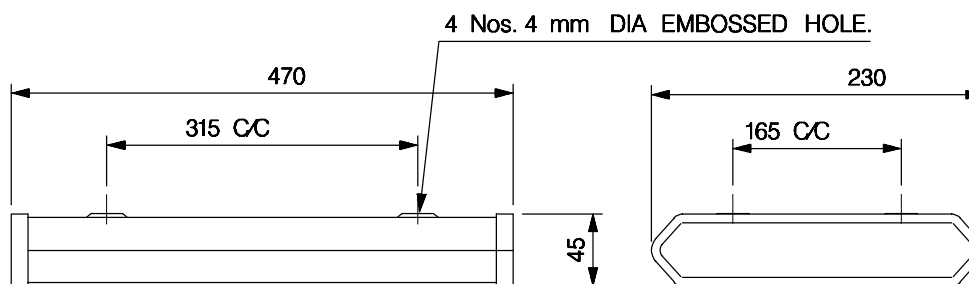

DECORATIVE LIGHTING

BJSM 02 236 CFL

BJSM 02 236 CFL WEB2

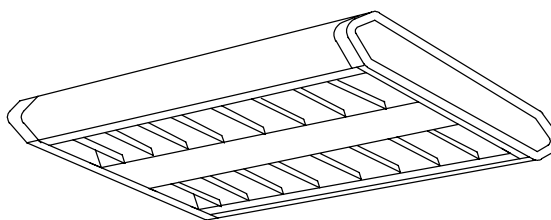

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

- Shops
- Show windows
- Carridors
- Architectural interiors, etc.

Specification

- Suitable for twin 36W CFLs
- Epoxy white powder coated CRCA sheet steel housing
- Anodised aluminium mirror reflector
- Plastic end plates
- Accessories for twin 36W CFLs, prewired upto the terminal block
- Wired with open construction ballast / HF electronic ballast

Electrical Data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in amps. at 240 V	Capacitor Mfd.	Power Factor
BJSM 02 236 CFL	2xCFL 'L' 36/4P	240	0.42	8.00	≥ 0.90
BJSM 02 236 CFL WEB2	2xCFL 'L' 36/4P	240	0.311	--	≥ 0.95

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRE Making the difference</p>	DRAWN	VDS	18-11-2003	FOR - STD.
	CHECKED	AAS	18-11-2003	REV - 1 DATE-25-01-2008
	APPROVED	CRR	18-11-2003	DRG.No
	DATA SHEET RELEASED ON DT-			SM 211 - 001