




INDUSTRIAL LIGHTING

BJVW 300

Non-integral vapour-proof wellglass luminaire for GLS/HID lamp

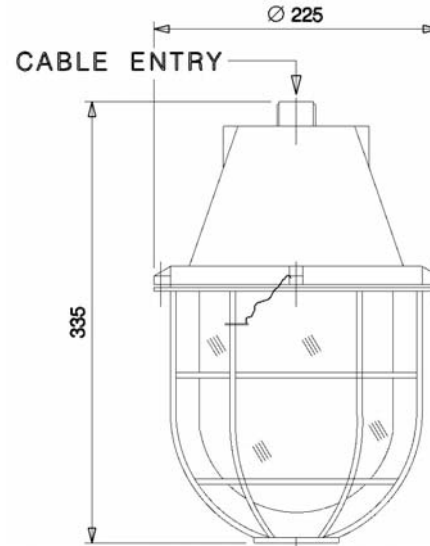

Nominal dimensions in mm Tolerance +/-5

Applications

- Steel plants
- Thermal power stations
- Fertilizer, pelletising plants
- Cement factories
- Paper mills
- Industrial bays, etc.

Specification

- Grey hammertone outside and stove enamelled white inside pressure die-cast aluminium alloy housing.
- Heat resistant wellglass fitted with a specially designed gasket.
- GES (E40) lamp holder, prewired upto the terminal block
- MS zinc plated wire guard.
- Wellglass suitable upto 300W GLS / 160 MLL lamp.
- Cable entry : 20 mm Top ET cable entry
- Degree of protection : IP 65

Note: Separate control gear is required when used with 150 SV lamp.

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRES Making the difference</p>	DRAWN	VDS	07-10-2006	FOR – Std
	CHECKED	KS		REV – 0 DATE–07-10-2008
	APPROVED	CRR		DRG.No
	DATA SHEET RELEASED ON DT-			VW 300 - 001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : luminaires@bajajelectricals.com