



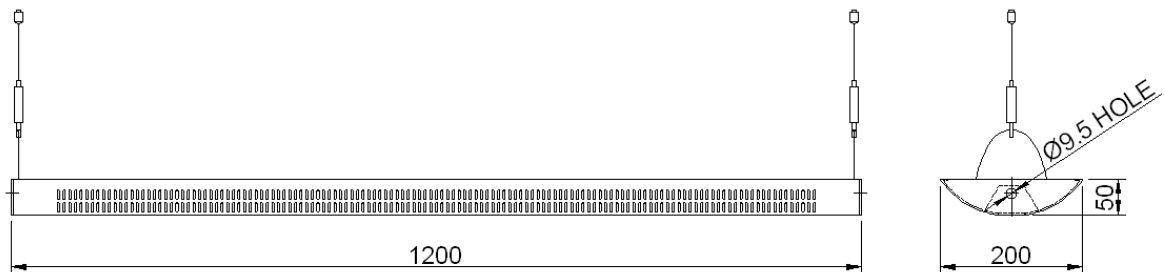

COMMERCIAL DECORATIVE LIGHTING
"LUMINA"

BLAUL 228/254 MSS LHD

Suspension mounting twin T5 fluorescent lamp uplighter

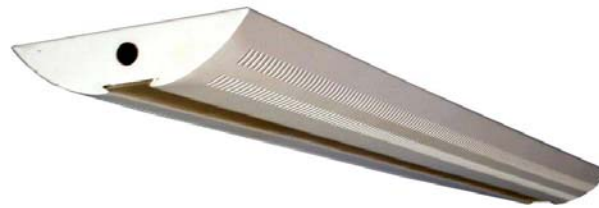

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

- Offices & banks
- Commercial establishments
- Hospitals & Laboratories
- Computer centers
- Education centers, etc.

Specification

- Elegantly designed, epoxy powder coated CRCA sheet housing.
- Preanodised aluminium reflector cover enables redistribution of light.
- Unique rectangular perforation.
- Acrylic infill in the center adds to the design element.
- Nylon ends enhances the aesthetics by breaking the monotony.
- Provides soothing and up and down light.
- Unique millennium suspension system enhances easy installation and alignment.
- Luminaire can be mounted in continuous row through cascading.
- Accessories for 2x28/54W T5 fluorescent lamps, prewired upto the terminal block.
- Wired with <10% THD HF electronic ballast.
- Models also available suitable for T5 14W & T8 36W lamps.

Electrical Data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current In Amps. at 240 V	Power Factor
BLAUL 228 MSS LHD	2 x T5 28W	240	0.265	≥ 0.99
BLAUL 254 MSS LHD	2 x T5 54W	240	0.505	≥ 0.99

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRES Making the difference</p>	DRAWN	KPM	17-04-2008	FOR – STD.
	CHECKED	DVRS		REV - 0 DATE-19-02-2009
	APPROVED	CRR		DRG.No
	DATA SHEET RELEASED ON DT-			AUL 228/254 MSS LHD-001