



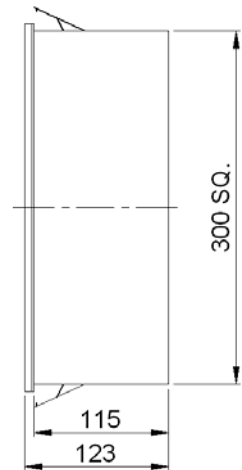

CUBEX Range  
BLCXR 218 CFL  
BLCXR 218 CFL WEBS

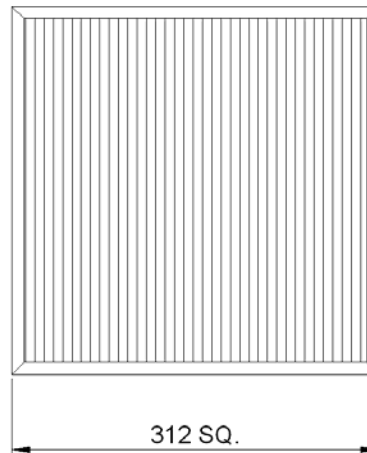

NOMINAL DIMENSIONS IN mm Tolerance +/-5

### Application

- Retail stores,
- Malls & super markets,
- Passage, corridor lighting (IT, ITES)
- Premium & Mini offices
- Consultancy rooms
- Reception areas
- Hospitality industry

### Specification

- Powder coated CRCA sheet steel housing fitted with high quality pre-anodised aluminium reflector.
- Powder coated extruded aluminium frame fitted with Plexiglas.
- Push fit fixing mechanism for the frame.
- Easy installation with four nos. SS clips.
- Accessories for 2 X 18W CFLs lamp prewired upto the terminal block.
- Wired with open construction ballast / HF electronic ballast.

### Electrical Data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current In Amps. At 240 V	Power Factor
BLCXR 218 CFL	2 X CFL 18W	240	0.37	--
BLCXR 218 CFL WEBS	2 X CFL 18W	240	0.157	≥ 0.90

Data subject to variation due to change/improvement in the design, materials and processes.

<p><b>BAJAJ LUMINAIRE</b> Making the difference</p>	DRAWN	KPM	05-04-2008	FOR - STD.
	CHECKED	DVRS		REV - 0 DATE-05-04-2008
	APPROVED	CRR		DRG.No
	DATA SHEET RELEASED ON DT-			LCXR 218 CFL - 001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : <a href="mailto:luminaires@bajajelectricals.com">luminaires@bajajelectricals.com</a>