




CUBEX Range

BLCXR 228 T5

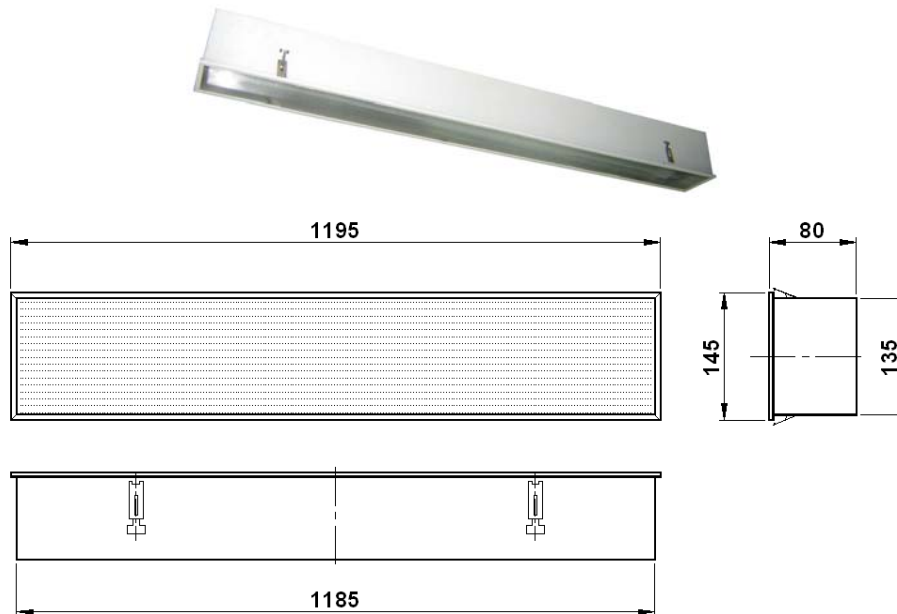

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

- Passage, corridor lighting (ESP. IT, ITES),
- Premium & Mini offices,
- Shopping malls,
- Consultancy rooms,
- Reception areas,
- Hospitality industry, etc.

Specification

- Powder coated CRCA sheet steel housing fitted with high quality aluminium reflector.
- Powder coated Aluminium extruded frame fitted with translucent PMMA.
- Accessories for 2 X 28W T5 lamp prewired upto the terminal block.
- Wired with HF electronic ballast.

Electrical Data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current In Amps. At 240 V	Power Factor
BLCXR 228 T5	2 x T5 28W	240	0.272	≥ 0.95

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRES Making the difference</p>	DRAWN	KPM	17-03-2010	FOR -
	CHECKED	DVRS		REV - 0 DATE-17-03-2010
	APPROVED	CRR		DRG.No
	DATA SHEET RELEASED ON DT-			LCXR 228 T5 - 001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : luminaires@bajajelectricals.com