




LEGEND

BLMRA 418 GC CAT II

BLMRA 418 GC CAT II WEB4

Recess Mounted Low Glare 4x18 FTL CAT II Luminaire with 3D lamellae Technology

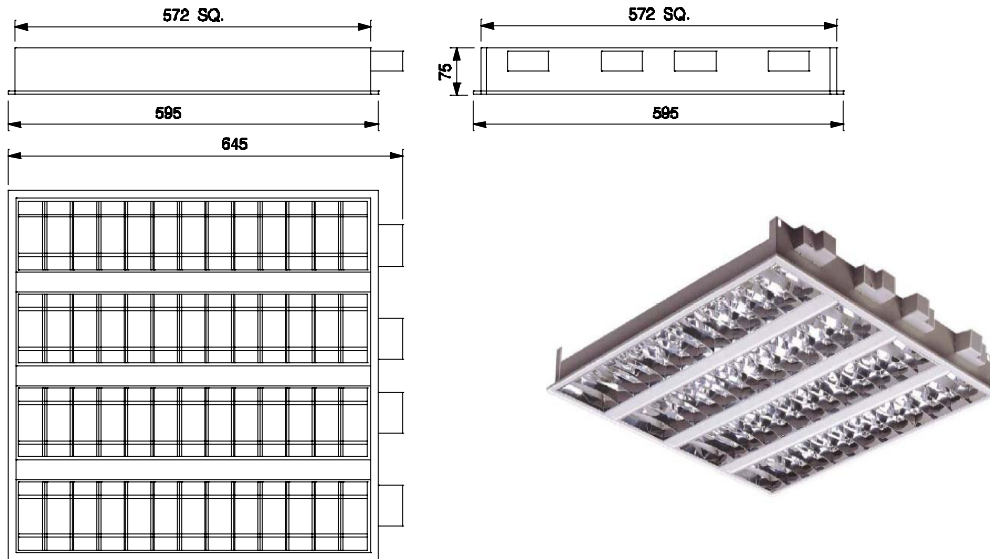

Dimensions in mm Tolerance +/-5

Applications

- Call centers
- IT and telecom offices
- Offices and banks
- Commercial establishments

Specifications

- Epoxy white powder coated CRCA sheet steel housing
- New generation Anti Glare (CAT II) Louver System employing 3D Lamellae glossy finish curved (GC) baffles.
- Modular Louver assemblies with Quick Lock & release clips
- Louver once released, held in position by the earthing cum holding cable
- Sides Easy Mount NOVEL DESIGN Plastic End Caps
- Symmetrical lamp positioning
- Accessories for quadruple 18/20W fluorescent lamps, prewired upto terminal block.
- Wired with open construction ballast / HF electronic ballast.

Electrical Data

Product Code	Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current In Amps. At 240 V	Capacitor Mfd.	Power Factor
160477	BLMRA 418 GC CAT II	FTL 4x18	240	0.43	8	≥ 0.90
530744	BLMRA 418 GC CAT II WEB4	FTL 4x18	240	0.311	--	≥ 0.95

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRES Making the difference</p>	DRAWN	VDS	13-03-2007	FOR - STD.
	CHECKED	DVRS		REV - 1 DATE-24-01-2008
	APPROVED	CRR		DRG.No
	DATA SHEET RELEASED ON DT-			BLMRA 418 GC CAT II - 001