




COMMERCIAL DECORATIVE LIGHTING

BLMRA 418 TD

BLMRA 418 TD WEB4

Recess mounting square modular, quadruple fluorescent lamp darklighter
for **Armstrong** ceiling

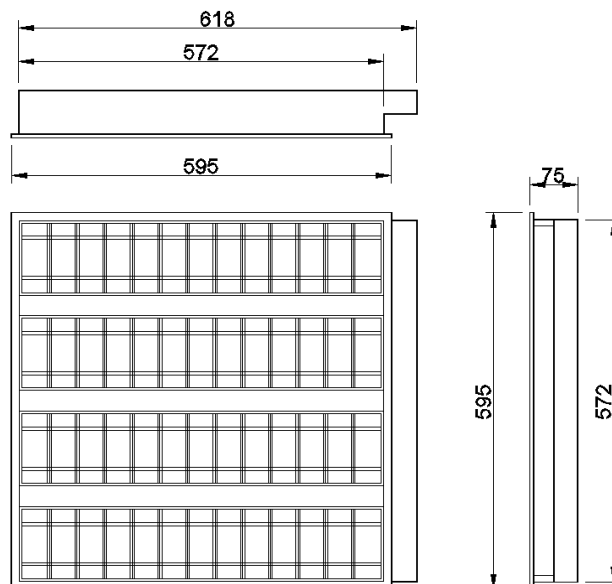

Nominal dimensions in mm Tolerance +/-5

Applications

- Airport lounges
- Banks & offices
- Computer centers, Control rooms
- Conference halls
- Hospitals & laboratories, etc.

Specification

- Epoxy white powder coated CRCA sheet steel square housing
- New generation Anti Glare (CAT II) Louver System employing 3D Lamellae Technology
- High quality pre-anodised aluminium double parabolic mirror reflector and louver assembly
- Louver fixing arrangement is push fit mechanism and suspended by two nylon strings for easy maintenance
- Accessories for quadruple 18W fluorescent lamps, prewired upto terminal block.

Electrical Data

Product Code	Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. at 240 V	Capacitor Mfd.	Power Factor
162017	BLMRA 418 TD	4 x T8 18W	240	0.43	8.00	≥ 0.90
530745	BLMRA 418 TD WEB4	4 x T8 18W	240	0.316	--	≥ 0.95

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRES Making the difference</p>	DRAWN	VDS	25-04-2006	FOR - STD.
	CHECKED	DVRS		REV - 1 DATE-24-01-2008
	APPROVED	CRR		DRG.No
	DATA SHEET RELEASED ON DT-			MRA 418 TD WEB4- 001