




LEGEND

BMLA 01 236/336 CFL LHD

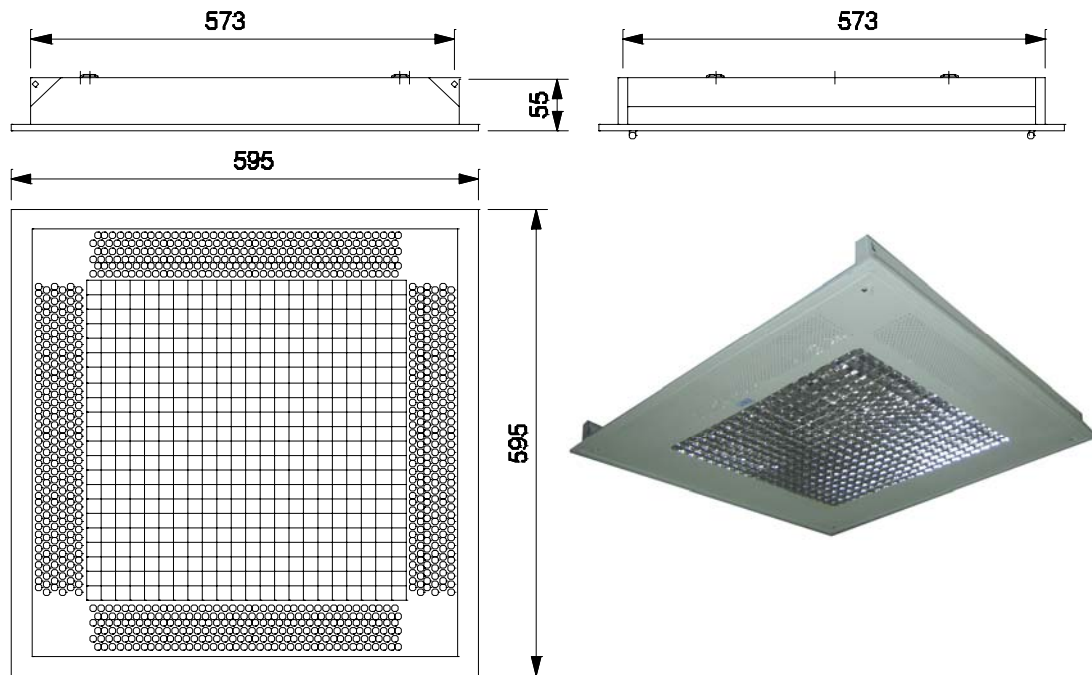

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

Recess mounting luminaire suitable for interior illumination of commercial complexes, showrooms, airport lounges, computer centers, banks, hospitals, conference halls, design offices, control rooms, laboratories, etc.

Specification

- CRCA sheet steel housing in which all accessories along with <10% THD HF electronic ballast are mounted and wiring is terminated on to a terminal block.
- It is covered with 3/4" x 3/4" **SQUARE PARABOLIC** metallised louver to provided glare free light.
- Computerized design high efficiency aluminium reflector to enhance the light distribution.
- The louver block is held in frame with toggles and it can be hinged for easy in relamping and maintenance.

Finish : Housing - White powder coated.

Electrical Data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. at 240 V	Power Factor
BMLA 01 236 CFL LHD	2xCFL 'L' 36/4P	240	0.299	≥ 0.99
BMLA 01 336 CFL LHD	3xCFL 'L' 36/4P	240	0.299 & 0.152	≥ 0.99

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRES Making the difference</p>	DRAWN	VDS	06-08-2004	FOR - STD.
	CHECKED	DVRS	06-08-2004	REV - 1 DATE-24-01-2008
	APPROVED	CRR	06-08-2004	DRG.No
	DATA SHEET RELEASED ON DT-			MLA 01 236 CFL LHD- 001
<p>BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.</p>				<p>* E-mail : luminaires@bajajelectricals.com</p>