




COMMERCIAL DECORATIVE LIGHTING

BMMS 236 CFL

BMMS 236 CFL WEB2

Surface mounting twin compact fluorescent lamp mirror optic luminaire

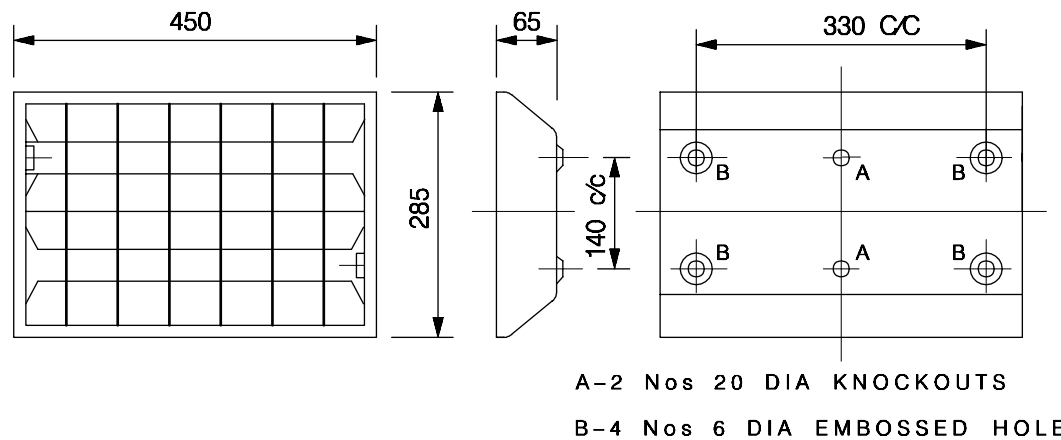

Dimensions in mm Tolerance +/-5

Applications

- Banks & offices
- Educational institutions
- Libraries
- Concourse halls,, etc.

Specification

- Epoxy white powder coated CRCA sheet steel housing
- High quality pre-anodised aluminium parabolic reflector and serrated matt anodised aluminium extruded baffles
- Louver fixing arrangement is push fit mechanism and suspended by two nylon strings for easy maintenance
- Accessories for twin 36 CFL lamp(s), prewired upto terminal block.
- Wired with open construction ballast / HF electronic ballast.

Electrical Data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. at 240 V	Capacitor Mfd.	Power Factor
BMMS 236 CFL	2x CFL 'L' 36/4P	240	0.42	8.00	≥ 0.90
BMMS 236 CFL WEB2	2x CFL 'L' 36/4P	240	0.311	--	≥ 0.95

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRES Making the difference</p>	DRAWN	VDS	16-10-2007	FOR - STD.
	CHECKED	DVRS		REV - 1 DATE-25-01-2008
	APPROVED	CRR		DRG.No
	DATA SHEET RELEASED ON DT- Oct.-07			BMMS 236 CFL - 001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : luminaires@bajajelectricals.com