




COMMERCIAL DECORATIVE LIGHTING

BMR 236 CFL W2EB

Recess mounting, twin 2x36W CFL mirror optic luminaire

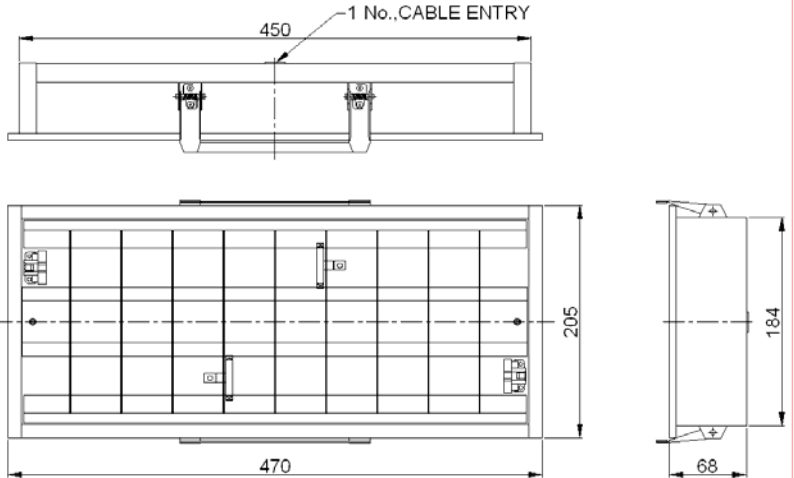

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

- Shops,
- Show windows,
- Corridors,
- Residential premises,
- Architectural interiors with false ceiling, etc.

Specification

- Epoxy broken white powder coated CRCA sheet steel housing
- High quality pre-anodised aluminium parabolic mirror reflector & powder coated CRCA baffles.
- Louver fixing arrangement is push fit mechanism and suspended by two nylon strings for easy maintenance.
- Swing type mounting clamp provided.
- Accessories for twin 36W CFLs, prewired upto the terminal block.
- Wired with HF electronic ballast.

Electrical Data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current at 240 V in Amps.	Power Factor
BMR 236 CFL W2EB	2 x 36W CFL	240	0.311	≥ 0.90

Data subject to variation due to change/improvement in the design, materials and processes.

<p><b>BAJAJ LUMINAIRE</b> Making the difference</p>	DRAWN	KPM	17-03-2008	FOR - STD.
	CHECKED	DVRS		REV - 0 DATE-17-03-2008
	APPROVED	CRR		DRG.No
	DATA SHEET RELEASED ON DT-			MR 236 CFL W2EB- 001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : <a href="mailto:luminaires@bajajelectricals.com">luminaires@bajajelectricals.com</a>