




"NEO" SERIES - COSMOS

BNCS 70 SV/MH C/O  
BNCS 150 SV/MH C/O

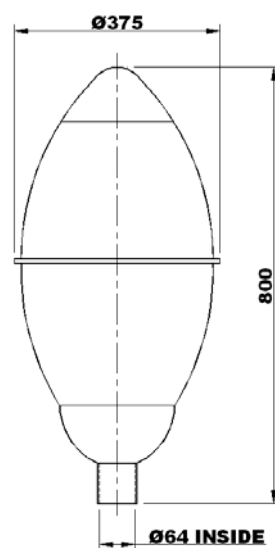

Dimensions in mm Tolerance +/-5

**Applications**

- Parks and gardens
- Entrance gates
- Pathways
- Residential colonies
- Security lighting, etc

**Features**

- Fully weather proof
- New generation accessories
- Easy to install and maintain
- Degree of protection: IP 55

**Specification**

- Copper dust finished die-cast aluminium alloy pole mounting spigot, Aluminium canopy housing all the accessories.
- Polycarbonate vizor housing with option of clear & opal vizor.
- E27 lamp holder for 70W SV/MH lamp prewired upto the terminal block.
- E40 lamp holder for 150W SV/MH lamp prewired upto the terminal block. Tubular lamp to be used in clear version
- Suitable for 60mm OD pipe entry with fixing bolts.

**Electrical Data**

Product Code	Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current In Amps. At 240 V	Capacitor Mfd.	Power Factor
110329	BNCS 70 SV C	HPSV T 70	220/240	0.40	10	≥ 0.85
110330	BNCS 70 MH C	MH T 70	220/240	0.40	10	≥ 0.85
110331	BNCS 70 SV O	HPSV T 70	220/240	0.40	10	≥ 0.85
110332	BNCS 70 MH O	MH T 70	220/240	0.40	10	≥ 0.85
110333	BNCS 150 SV C	HPSV T 150	220/240	0.80	20	≥ 0.85
110334	BNCS 150 MH C	MH T 150	220/240	0.80	20	≥ 0.85
110335	BNCS 150 SV O	HPSV T 150	220/240	0.80	20	≥ 0.85
110336	BNCS 150 MH O	MH T 150	220/240	0.80	20	≥ 0.85

Data subject to variation due to change/improvement in the design, materials and processes.

<p><b>BAJAJ LUMINAIRES</b> Making the difference</p>	DRAWN	VDS	24.04-2008	FOR -
	CHECKED	KS		REV - 0 DATE-24.04-2008
	APPROVED	CRR		DRG. No
	DATA SHEET RELEASED ON DT-10 Sept-08			<b>BNCS 70/150 C/O - 001</b>