




**INDUSTRIAL LIGHTING**  
**PLASMA**  
**BPRF 218 C LHD**

Recess mounting FRONT OPENING clean room luminaire suitable for twin CFL

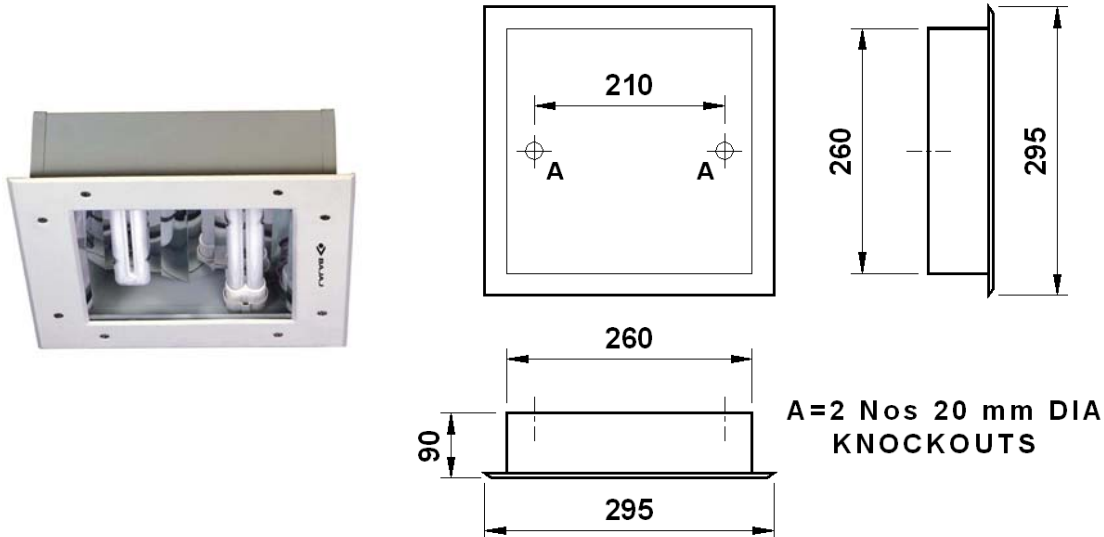

Dimensions in mm Tolerance +/-5mm

**Applications**

- Interior illumination in Pharmaceuticals
- Food & Beverage industries
- Electronic component manufacturing areas
- Laboratories, etc.

**Specification**

- Epoxy white powder coated CRCA sheet steel housing
- High quality pre-anodised aluminium reflector
- Control gear and new generation accessories with < 10 % THD electronic ballast mounted on removable gear tray and pre-wired upto terminal block
- PMMA acrylic cover is sealed with bottom frame & specially developed non-hygroscopic gasket to ensure foolproof dust/ particle protection
- Maintenance from **front side**
- Re-lamping through hingeable front cover fixed to the housing with loss proof SS screws.
- Hardware S.S
- Environment Protection: - IP65

**Electrical Data**

Product Code	Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. at 240 V	Power Factor
530860	BPRF 218 C LHD	2 x `L' Type CFL 18W	240	0.152	≥ 0.99

Data subject to variation due to change/improvement in the design, materials and processes.

<p><b>BAJAJ LUMINAIRES</b>                  Making the difference</p>	DRAWN	KPM	29-11-2008	FOR – STD.
	CHECKED	DVRS		REV - 1 DATE-02-05-2009
	APPROVED	CRR		DRG. No
	DATA SHEET RELEASED ON DT-			BPRF 218 C LHD-001
<b>BAJAJ ELECTRICALS LIMITED</b> 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : <a href="mailto:luminaires@bajajelectricals.com">luminaires@bajajelectricals.com</a>