




INDUSTRIAL LIGHTING
PLASMA

BAJAJ BPRF 236/336/355 C LHD

Recess mounting FRONT OPENING clean room luminaire suitable for twin/triple CFL

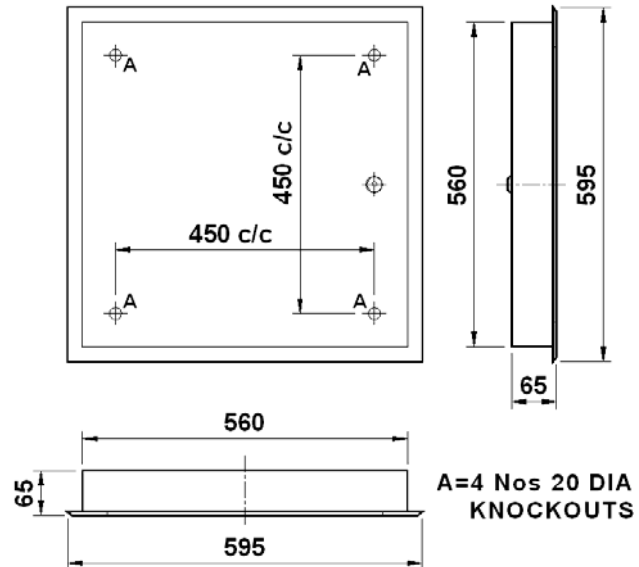

Dimensions in mm Tolerance +/-5mm

Applications

- Interior illumination in Pharmaceuticals, Food & Beverage industries, Electronic component manufacturing areas, laboratories, etc.

Specification

- Epoxy white powder coated CRCA sheet steel housing
- High quality pre-anodised aluminium reflector
- Control gear and new generation accessories with < 10 % THD electronic ballasts mounted on removable gear tray and pre-wired upto terminal block
- PMMA acrylic cover is sealed with bottom frame & specially developed non-hygroscopic gasket to ensure foolproof dust/ particle protection
- Maintenance from front side
- Re-lamping through hingeable front cover fixed to the housing with loss proof SS screws.
- Hardware S.S
- Environment Protection:- IP65

Electrical Data

Product Code	Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. at 240 V	Power Factor
530861	BPRF 236 C LHD	2 x CFL 36	240	0.303	≥ 0.99
530862	BPRF 336 C LHD	3 x CFL 36	240	0.303 + 0.152	≥ 0.99
--	BPRF 355 C LHD	3 x CFL 55	240	0.257 + 0.509	≥ 0.99

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRE Making the difference</p>	DRAWN	VDS	07-07-2007	FOR – STD.
	CHECKED	DVRS		REV - 1 DATE-02-05-2009
	APPROVED	CRR		DRG. No
	DATA SHEET RELEASED ON DT-			BPRF 236/336 C LHD - 001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : luminaires@bajajelectricals.com