




DECORATIVE LIGHTING

BAJAJ BSMLA 01 414 LHD

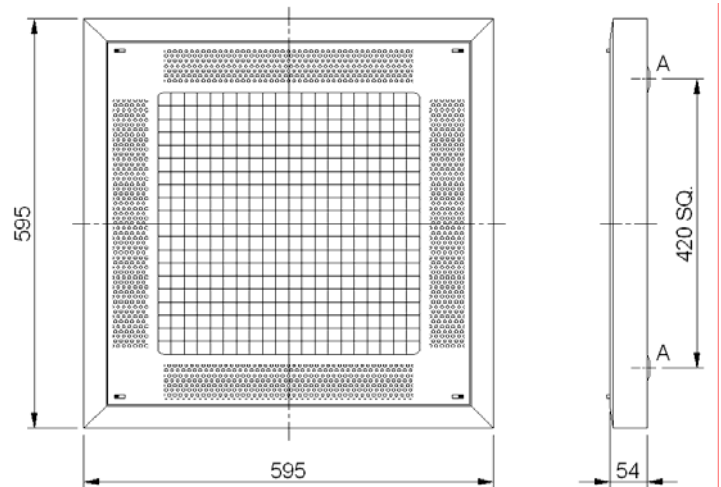

A = 4 DIA EMBOSSED HOLE, 4 Nos.

Nominal Dimensions in mm Tolerance +/-5

Application

- Commercial complexes
- Airport lounges
- Computer centers
- Conference halls
- Design offices
- Control rooms
- Laboratories, etc.

Specification

- CRCA sheet steel housing in which all accessories along with ballast are mounted and wiring is terminated on to a terminal block.
- The louver is **SQUARE PARABOLIC** metallised louver (P5) to provide glare free light.
- The louver block is held in frame with toggles and it can be hinged for ease in relamping and maintenance.
- Wired with <10% THD HF electronic ballast.
- Finish: White powder coated.

Electrical Data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. at 240 V	Power Factor
BSMLA 01 414 LHD	4 x T5 14W	240	0.261	≥ 0.99

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRES Making the difference</p>	DRAWN	KPM	14-11-2008	FOR – STD.
	CHECKED	DVRS		REV - 0 DATE-14-11-2008
	APPROVED	CRR		DRG.No
	DATA SHEET RELEASED ON DT-			SMLA 01 414 LHD - 001