




DECORATIVE LIGHTING

BSP 236 CFL

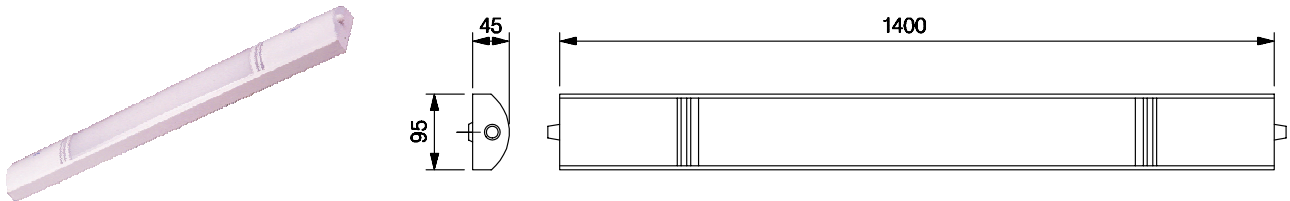

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

- Stair case,
- Passages/corridors,
- Mirror-lite,
- Commercial/residential interiors, etc.

Specification

- The housing of the luminaire is made of CRCA steel sheet.
- It is prewired up to terminal block with all accessories such as copper ballast, lamp holder, starter and starter seat.
- The lamp is covered with reeded clear polystyrene diffuser to provide soft light.
- The luminaire is suitable for direct mounting on wall.
- Suitable for 2xCFL 36W lamp
- Finish: Housing - white powder coated.

Electrical Data

Cat. Ref.	Lamp Type & Wattage (W)	Nominal Voltage (V)	Mains Current in amps. at 240 V	Capacitor Mfd.	Power Factor
BSP 236 CFL	CFL 2x36	240	0.42	8.00	≥ 0.90

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRES Making the difference</p>	DRAWN	VDS	05-08-2004	FOR – STD.
	CHECKED	DVRS	05-08-2004	REV-0 DATE-05-08-2004
	APPROVED	CRR	05-08-2004	DRG.No
	DATA SHEET RELEASED ON DT-			BSP 236 CFL - 001